SUPERSEDED OR VOID DATA

USE OF

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

ROOF-CEPTOR® INDIRECT WASTE DRAIN

7 1/4"(185) TOP - MEDIUM DEPTH RECEPTORS

FUNCTION: Recommended for use in roof areas to receive waste water from air conditioning units, cooling towers and other mechanical equipment installed on the roof. The solid water dam prevents storm water from entering the waste line. The large dome bottom strainer provides ample drainage and prevents entry of debris.

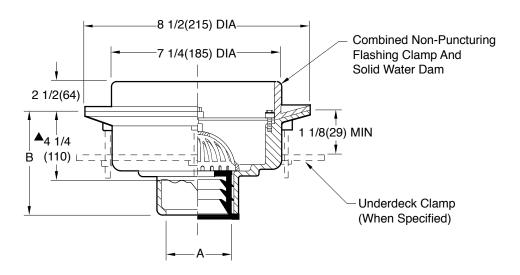


Fig. 3960C............CAULK OUTLET
Fig. 3960Y........NO-HUB OUTLET
Fig. 3960T.......THREADED OUTLET

▲This Dimension to Internal Stop of Speedi-Set Gasket

recommended deck openings: with suffix -R - 9"(230) less suffix -R - 7 3/4"(195)

VARIATIONS:

1	A SIZE	02 (50)	03 (75)	04 (100)			
		5 1/2(140) for Caulk, NO-HUB					
		and Speedi-Set. 4 1/4(110) for Threaded					
		ded					

REGULARLY FURNISHED:

Duco Cast Iron Receptor with Solid Water Dam and Secured Cast Iron Dome Bottom Strainer.

Extension -E

L Speedi-Set Service Weight

LXH Speedi-Set Extra Heavy

Roof Sump Receiver -R

Underdeck Clamp -UDC

OPTIONAL MATERIALS:
All Galvanized -G

NOTE: Dimensions shown in parentheses are in millimeters.

шосв	10-4-18 04/22/04	Removed "vandal proof" Rev. Dim., Var., Added Note Added UDC to Variations Added Millimeters	KK TBW JJ EMB	CL CL BS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 3960
REV.	DATE	DESCRIPTION	BY	CKD. BY			