



**JAY R. SMITH MFG. CO.**  
MEMBER OF MORRIS GROUP INTERNATIONAL

# SMITH CONTRACTOR LABOR SAVING AND VALUE ADDED PRODUCTS



From prefabrication to install, these products help save you time and money at every stage of the project.

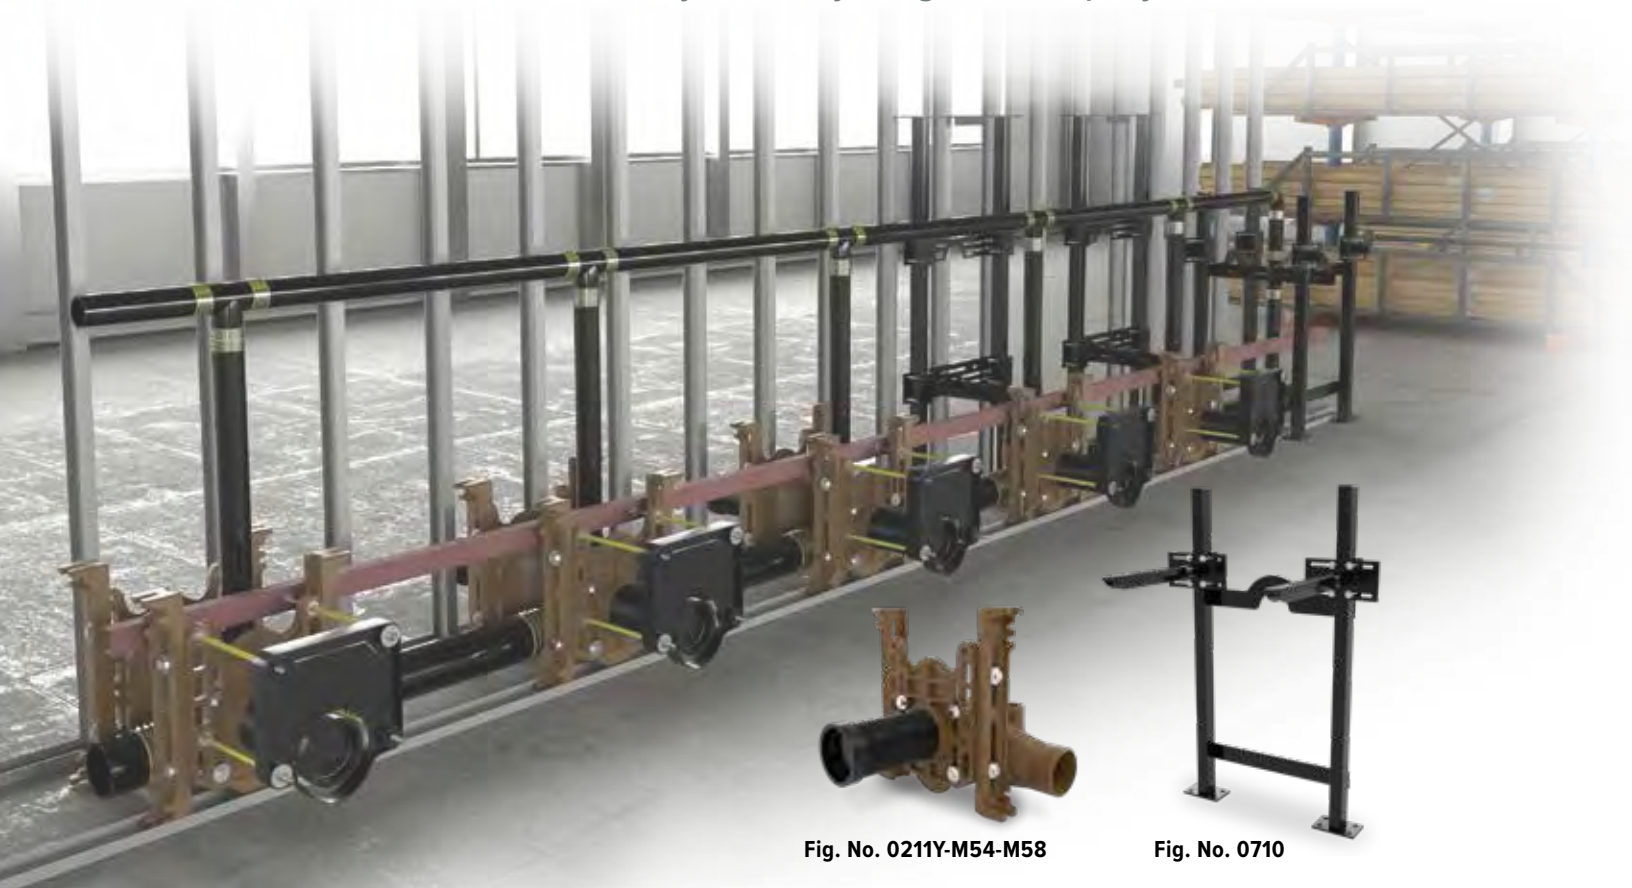


Fig. No. 0211Y-M54-M58

Fig. No. 0710



Fig. No. 4020



Fig. No. 1015



Fig. No. 5515



Figure No. 5515-R

# SAVE TIME & MONEY WITH JAY R. SMITH MFG. CO.

## LABOR SAVER® SUPPORTS

Labor Saver® fixture supports for water closets, lavatories, and toilets help you complete jobs faster and more efficiently.

### TIME ADDS UP

Each Labor Saver fixture support can save you 15-20 minutes on installation time per support. This adds up to hours over the course of a job!

### HOW?

Labor Saver fixture supports come pre-assembled! Supports feature a one-piece, unitized construction, while the Quarterback Water Closet Support ships with legs and faceplate already attached.

- Pre-assembly means...
  - No missing parts
  - Faster install at pre-fab shop creating faster install on jobsite
  - Less waste

- Stocked for shipment
  - Quicker order fulfillment
  - Ability to take on rush projects

### ENHANCED PREFABRICATION CAPABILITIES

- Assemble any number of fixture supports
- Many options for battery prefabrication style
- All supports feature numerous attachment points for maximal flexibility.
- Transport entire battery to job site as one piece.


### PREFABRICATION SAVES

- Time
- Labor
- Money




**Urinal Support with Hanger Plate  
Fig. No. 0617**

- Floor-mounted legs
- Easy field adjustment
- Suitable for narrow wall and metal stud configurations
- TAB option allows for two anchors per foot (Fig. No. 0710-TAB)
- Fixture-specific arms eliminate additional labor for lengthy in-field configuration and/or adjustment
- Height and side-to-side adjustment is done from the front of the support, using four nuts

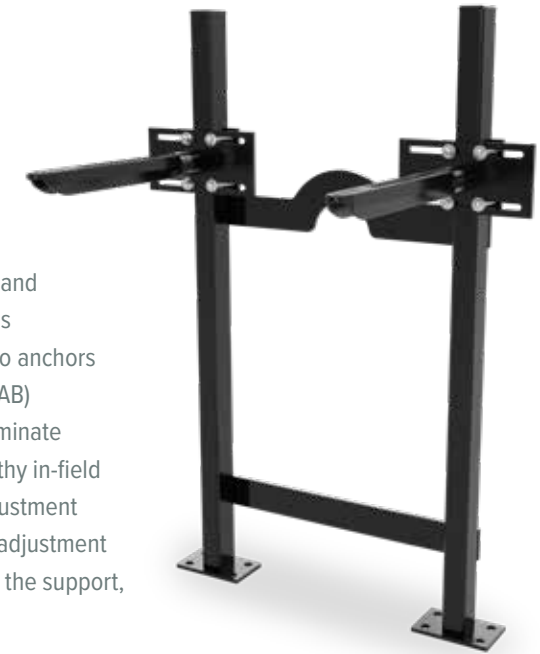

**Lavatory Support with Concealed Arms  
Fig. No. 0710**

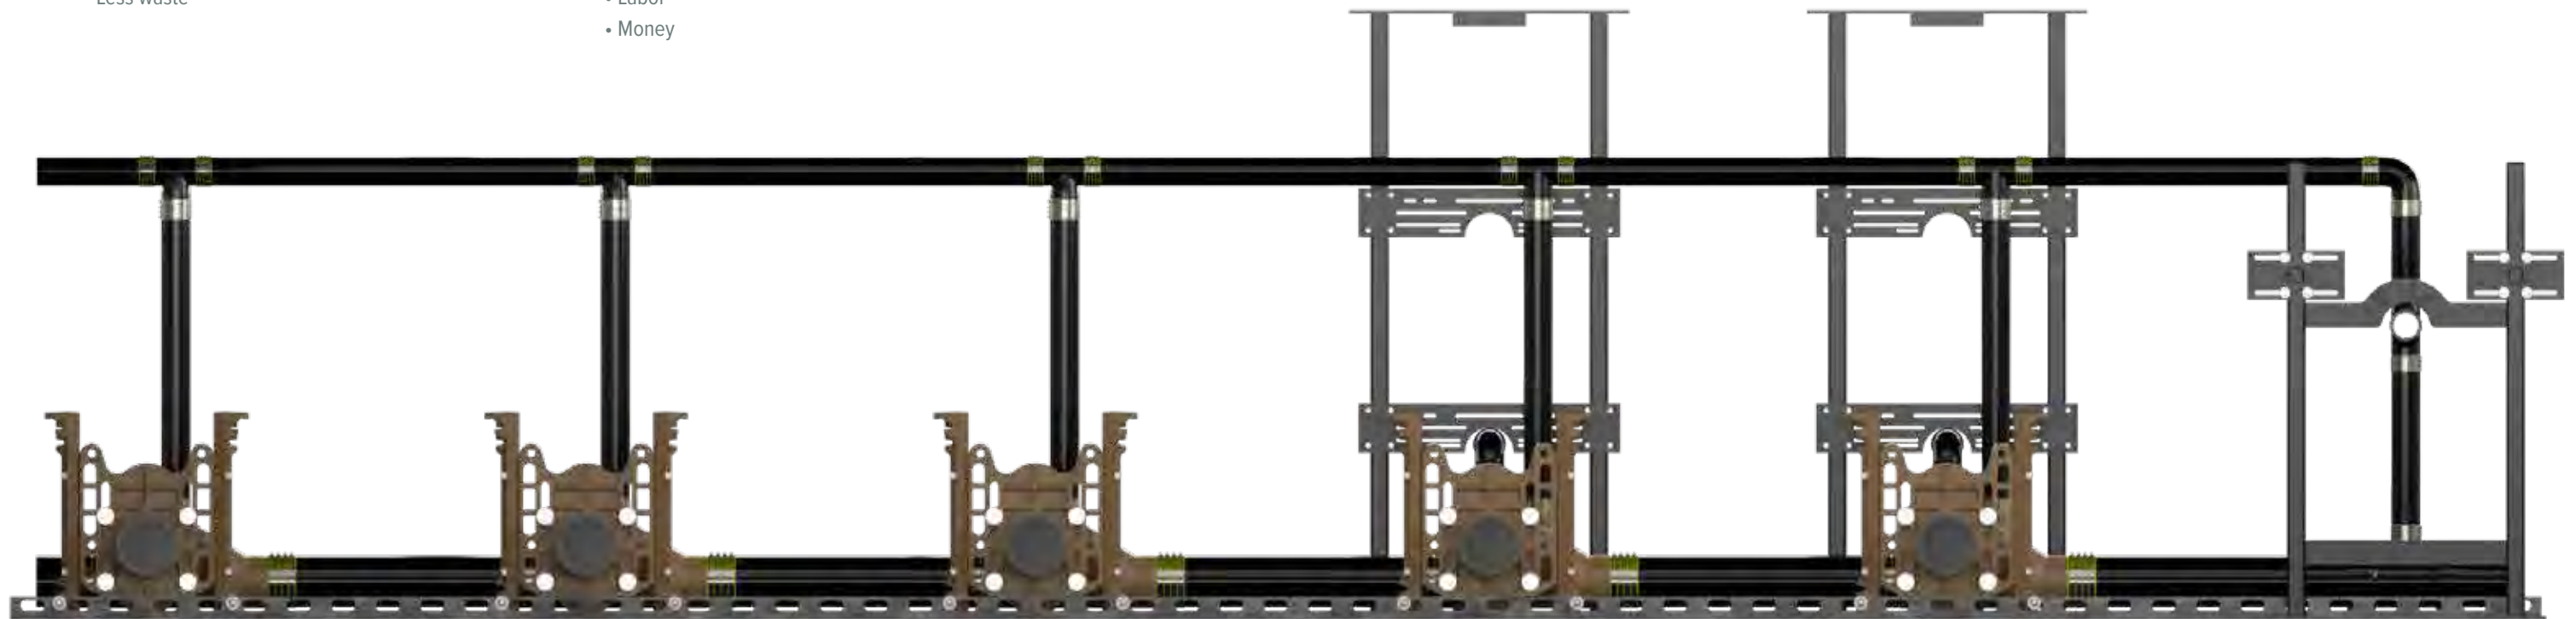


Our labor-saving fixture supports feature a number of attachment points, making it easy to prefabricate and plumb batteries before transporting to the job site.

# QUARTERBACK® WATER CLOSET SUPPORT

## LABOR SAVING FEATURES

Quarterback Water Closet Support  
Fig. No. 0211Y-M54-M58

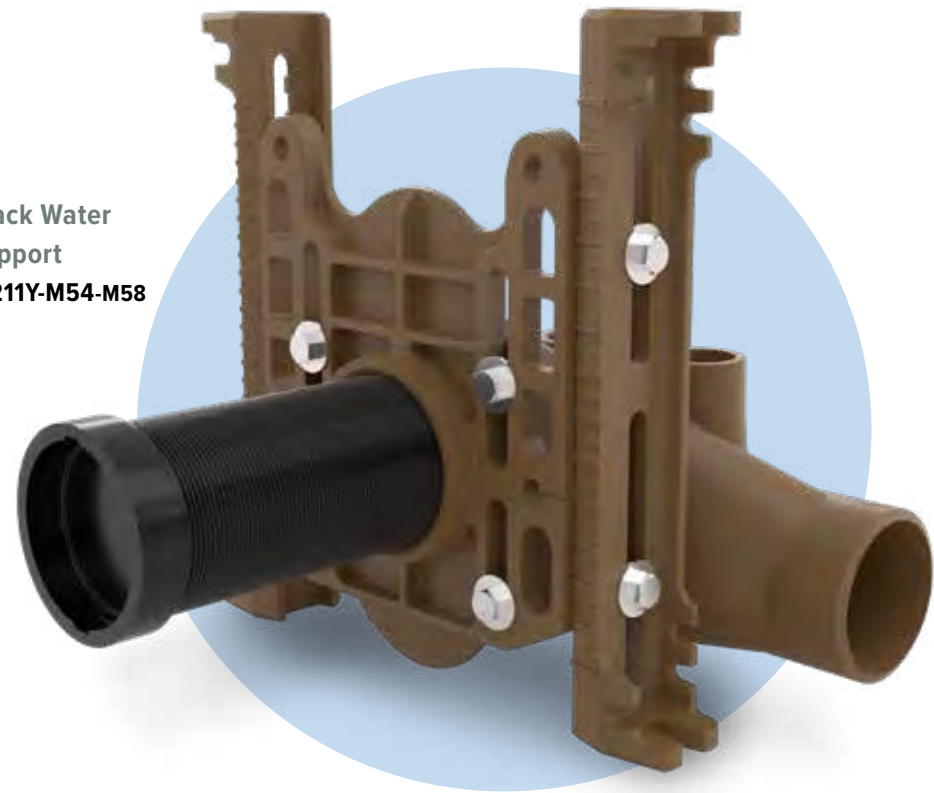

Left, right, double, and vertical fittings available. Fittings with auxiliary inlet option tie in nearby urinal or lavatory

Optional auxiliary inlet

36" long barrel fittings connect fixtures supports to each other, eliminating pipe connections and possible leak points




Legs provide numerous mounting options for fixture support battery prefabrication or flush valve supply line support

Legs provide enough space for job-site adjustments between studs



Easy access to faceplate bolts for quick adjustment during prefabrication

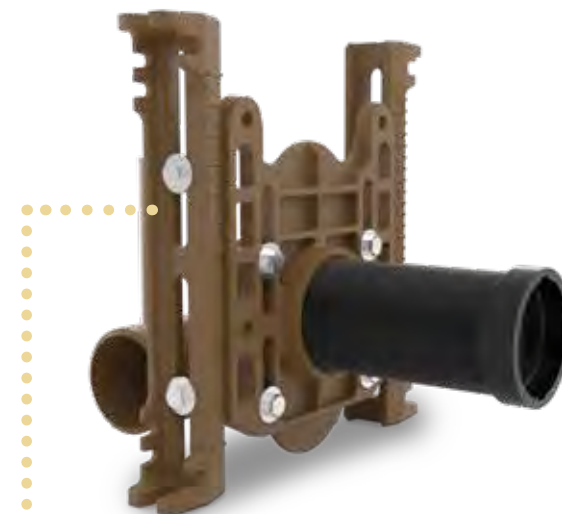


Faceplate kit arrives with legs pre-secured to faceplate. Adjust-to-wall and O-ring style faceplate kits available




One anchor per leg for fast and easy installation (anchor is installed through notch in bottom of foot)


# BATTERY PREFABRICATION OPTIONS

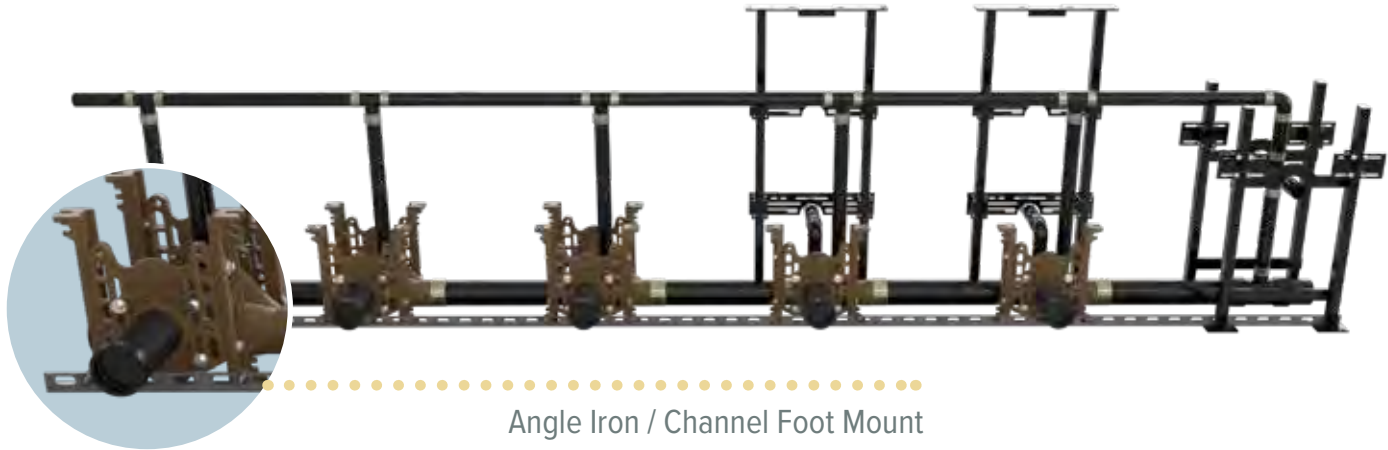

Angle Iron / Channel Foot Mount

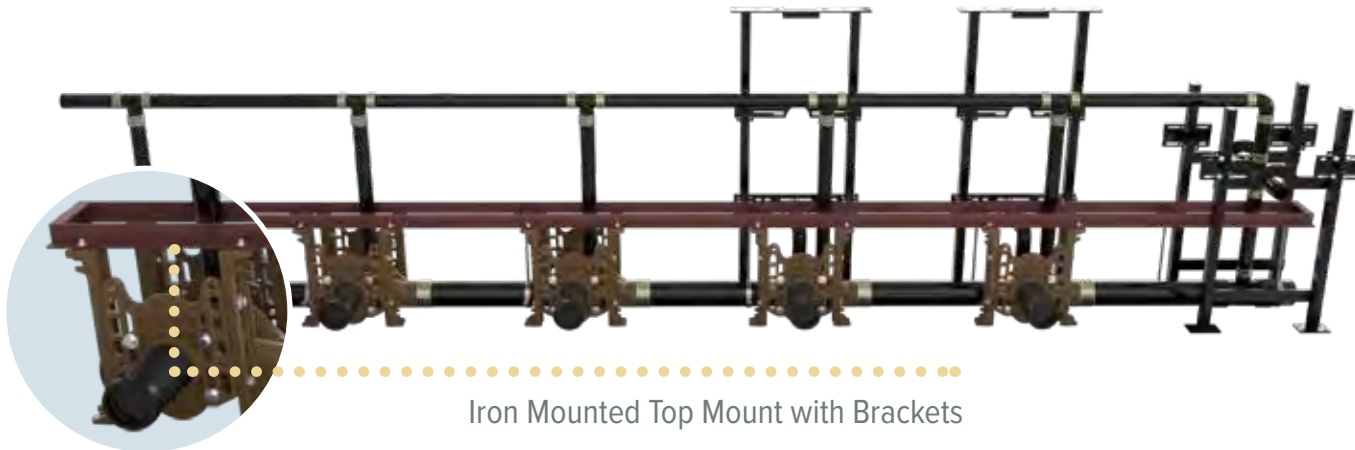


Iron Mounted Top Mount with Brackets

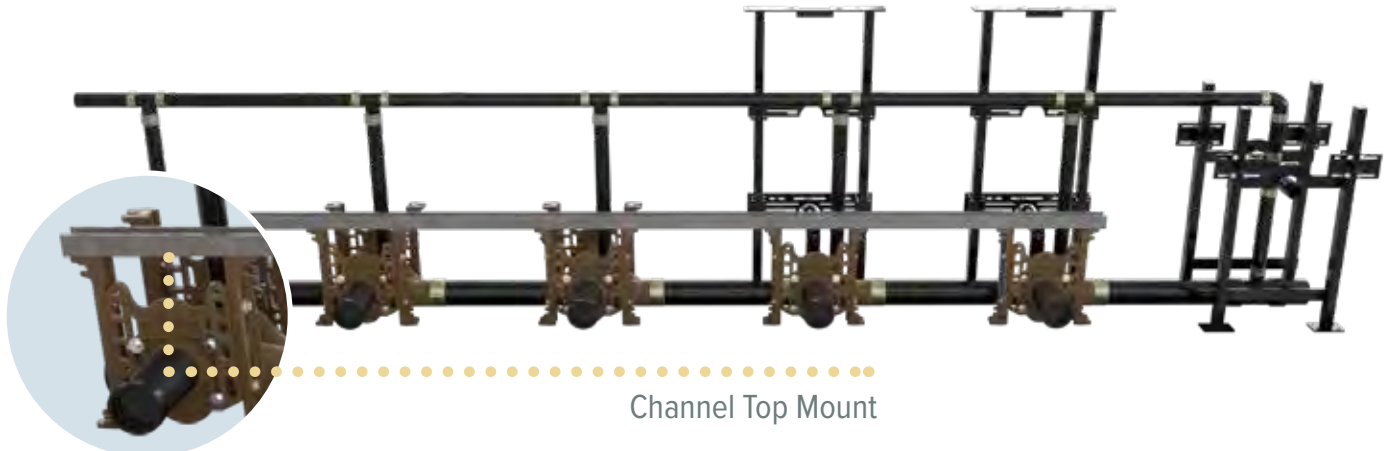


Channel Top Mount



Angle Iron Floor Mount

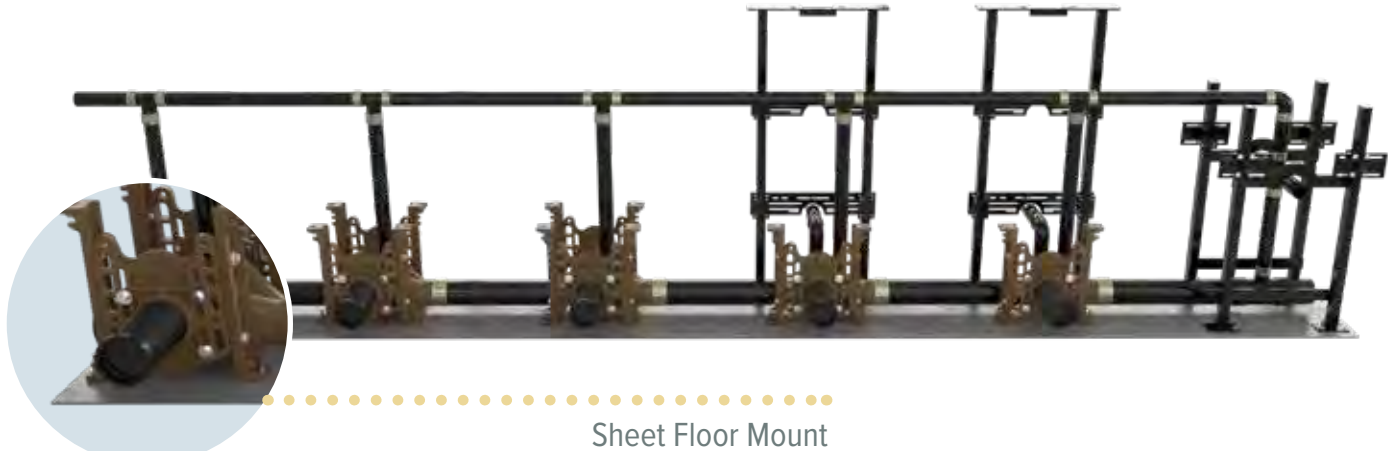

Sheet Floor Mount

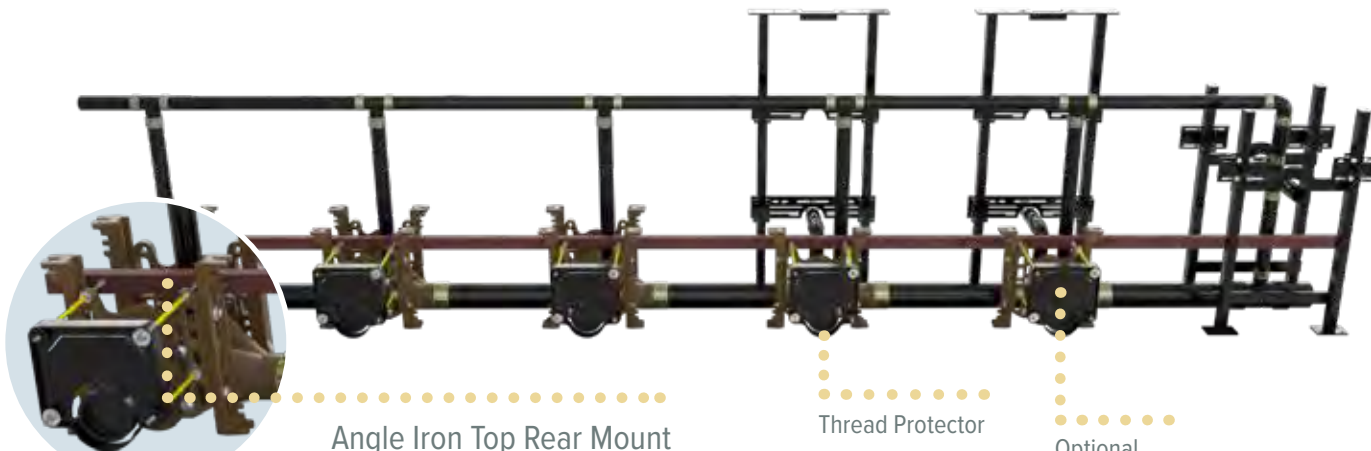

Angle Iron Top Rear Mount

Thread Protector

Optional Tiling Frame

Batteries shown are for prefabrication and example only and are not methods for permanently anchoring the battery.

# QUAD CLOSE® “STINK STOPPER” TRAP SEAL DEVICE

10 Year Warranty, Simple to Install and Easy to Remove—No Special Tools Needed, Fits Almost Any Floor Drain

The Answer to  
Infrequently Used  
Floor Drains and  
Sewer Gas Odors



- 1.** Sewer gas emissions are a real problem.
- 2.** This is a job for the Stink Stopper!
- 3.** The Stink Stopper is inserted into the strainer throat...
- 4.** And sewer gas emissions are sealed off.



**Quad Close Trap Seal Device  
Figure No. 2692**

**Easy to Install**—Insert the device in the drain outlet until it is flush with the bottom of the drain or top of the outlet piping. For strainers, insert the trap seal as low as possible into the throat of the strainer.

**A value for the purchaser**—Designed to handle a wide range of pipe and internal drain body diameters. Can be retrofitted into existing drains



Available in 1-1/2", 2"\*, 3"\*, 3-1/2"\*, 4"\*, & 6" sizes

**A Tested and Reliable Solution** –  
IAPMO Listed: File No. 7479.\*  
ASSE Listed: Standard 1072—  
Record No. 1435\*



Patent No. 8,844,572

# TWIST-TO-FLOOR® ADJUSTABLE CLEANOUT TOPS

Versatility in Adjustment Before and After the Pour

**Flooring**

Unique top assembly allows for interchangeability of scoriated, tile or terrazzo covers

One size top assembly for 2-4" outlet ferrules

**Concrete**

Finished Floor Cleanouts with “Twis-to-Floor” Adjustable Tops  
**Figure No. 4020**



- Top frame stays in place when cover is removed
- Thicker finished floor cover reinforced with support ribs for strength and durability
- Smooth outside surface of the top assembly and thread protector Styrofoam ring maximize adjustment during and after the finished floor concrete pour



**Ferrule Assembly Features:**

- Top assembly offers easy attachment to ferrule.
- Easy to install clamping device.
- Cast iron clamping device providing maximum clamping force to the membrane.

## ADJUSTABLE ROOF DRAIN

Easily adjusts to accommodate variations in insulation depth




Every bit of time savings counts over the course of a job. With the adjustable Roof Drain, you can:

- Simplify with one product rather than several of different sizes
- Make on-the-fly adjustments as needed
- Adjust to a wide range of sizes—from 1 1/4" to 4"

Used in flat roofs of any construction

## SIPHONIC ROOF DRAIN

Full-bore flow in smaller pipes reduces material cost

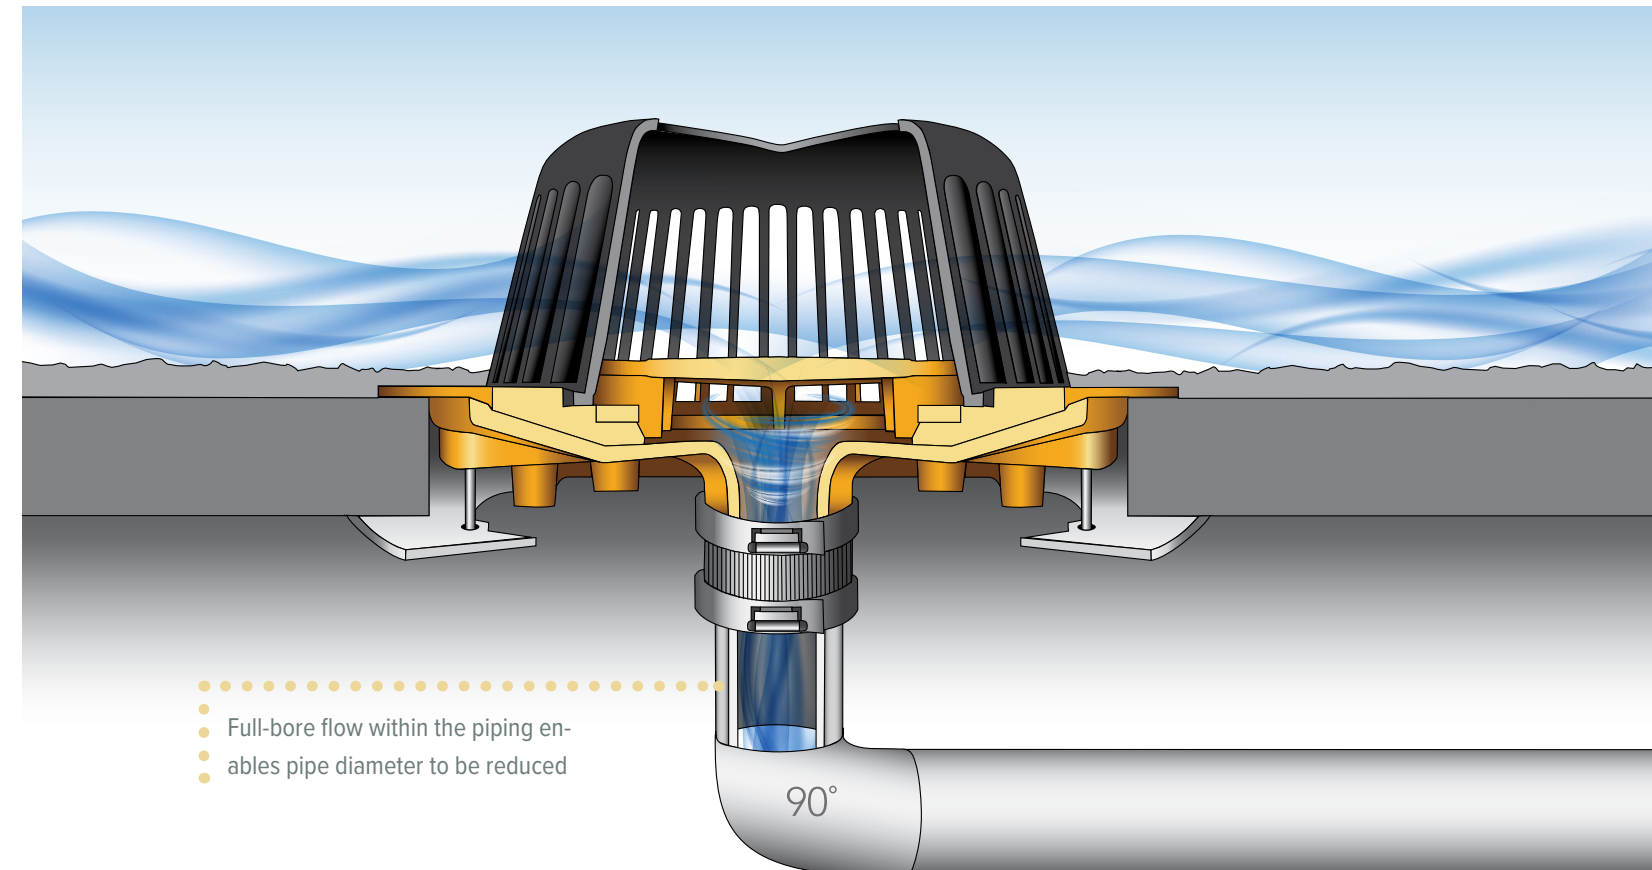

**Siphonic Roof Drain**  
Figure No. 1005



**Siphonic Gutter Drain**  
Figure No. 1605


- Siphonic action is independent of pipe pitch or gradient.
- Smaller pipe diameters allow maximum use of open space and reduce material costs
- Minimizes slab installation costs
- Promotes self-cleaning of debris from the piping system.
- Fully tested and certified in accordance with ANSI/ASTM A112.6.9 "Siphonic Roof Drains"

## DECK PLATES

Creates a flat surface for the drain to sit on

- \* Recesses drain slightly to prevent water build-up
- \* Pre-assemble deckplate to drain, saving time at job site
- \* Only one rectangular penetration needed for deck plates with multiple drains

Pre-assemble drain and deck plate and install as one piece

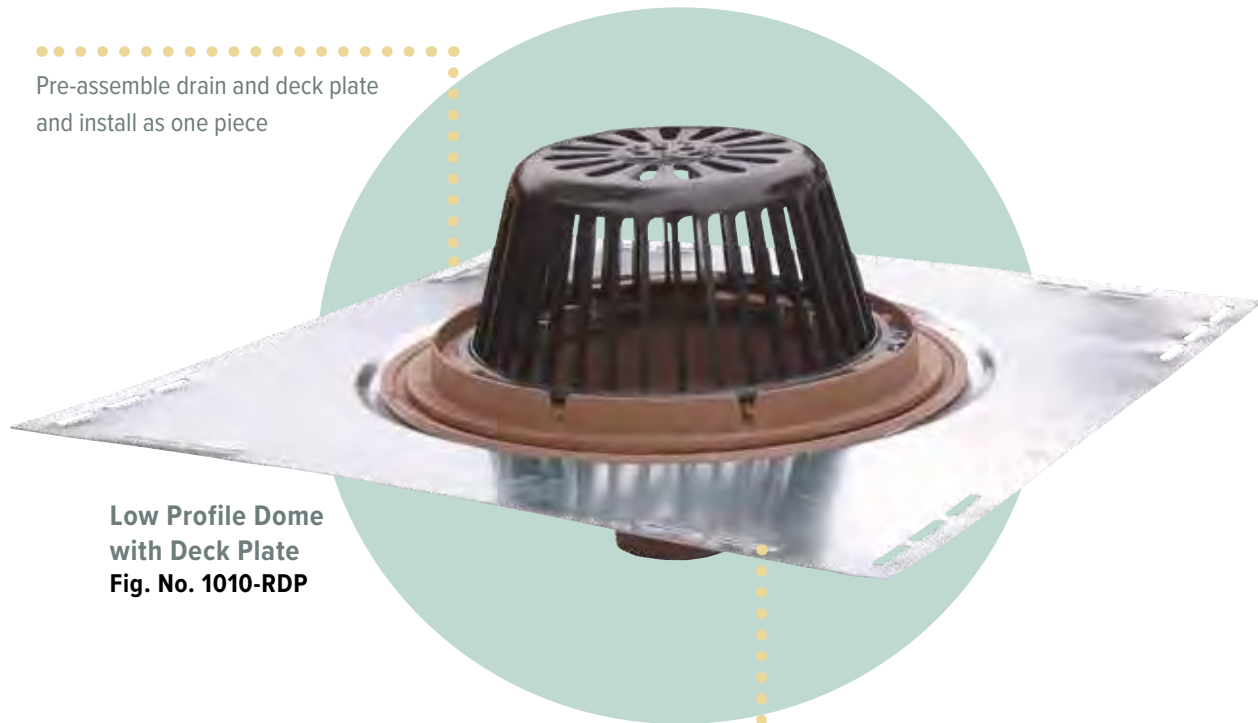

**Low Profile Dome with Deck Plate**  
**Fig. No. 1010-RDP**

Single and multi-drain configurations available



**Roof Drain and Overflow Drain with Deck Plate**  
**Fig. No. 1800**

## TOP MOUNT DRAIN ELEVATOR

Adjustable time-saving device eliminates need for additional products

- Adjustable to compensate for insulation thickness. Overall adjustment height of 6-3/4"
- Drain Elevator is outside of the waterway, eliminating leaks
- Top adjustment at deck for an easier and more secure installation

The cast thread design provides for a quick adjustment—up or down with just one turn



**Top Mount Drain Elevator**  
**Fig. No. 1010DEK**

Top mount reversible collar eliminates the need for a conventional extension, underdeck clamp and sump receiver




Elevates Figure Numbers 1005, 1010, 1070 and 1080 type roof drains

# GUARDIAN PLUS DUAL CHECK HYDRANT

## Repair At Your Convenience

Shut off water right at the hydrant—no need to shut off service to the entire building!

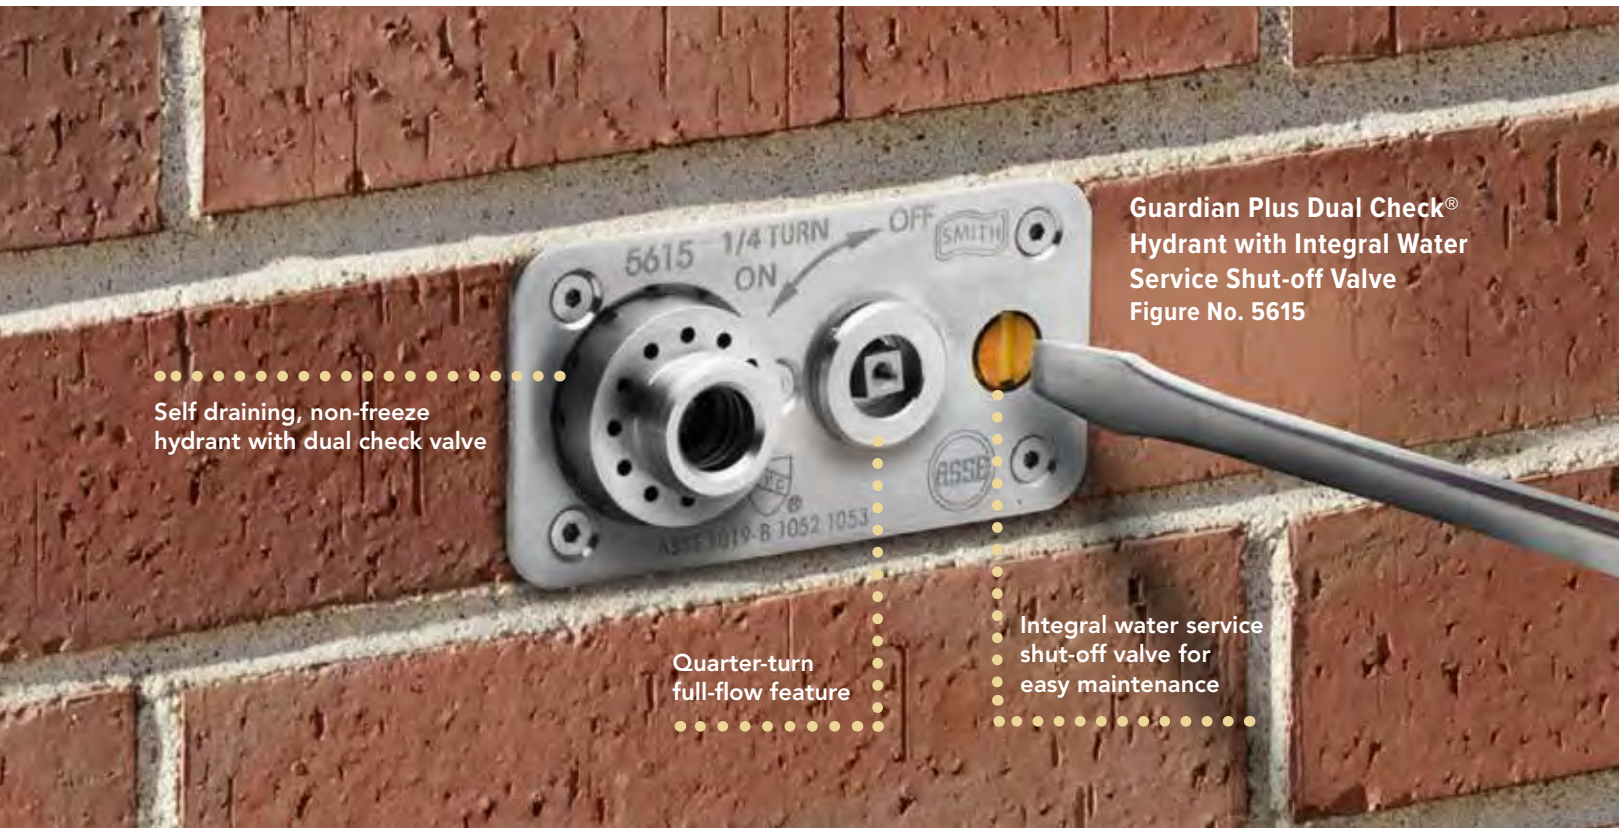

Self draining, non-freeze hydrant with dual check valve

Quarter-turn full-flow feature

Integral water service shut-off valve for easy maintenance

Guardian Plus Dual Check® Hydrant with Integral Water Service Shut-off Valve  
Figure No. 5615



Guardian Plus Dual Check® Box Hydrant with Integral Stop Water Service Shut-off Valve and Non-Freeze Protection  
Fig. No. 5515

- Self draining, non-freeze hydrant with dual check valve and integral vacuum breaker
- 3/4" (19) inlet and hose connection
- Bronze hydrant with stainless steel face
- Flush installation eliminates catch points
- Sized to one standard brick
- Available with or without tamper-proof, locking enclosure

### Specifications:


- Complies with ASME A112.21.3M
- Complies with ASSE 1019B, 1052 and 1053
- IAPMO Listed, File #2749



# CUT LABOR TIME BY 75%

## Cored Drill Hydrant Box offers easy install in concrete buildings

Designed for tilt-up concrete buildings, this hydrant box can cut installation time by 75% or more. Once the building is erected and plumbed, just drill a 6" hole in the wall and slide the hydrant right in.

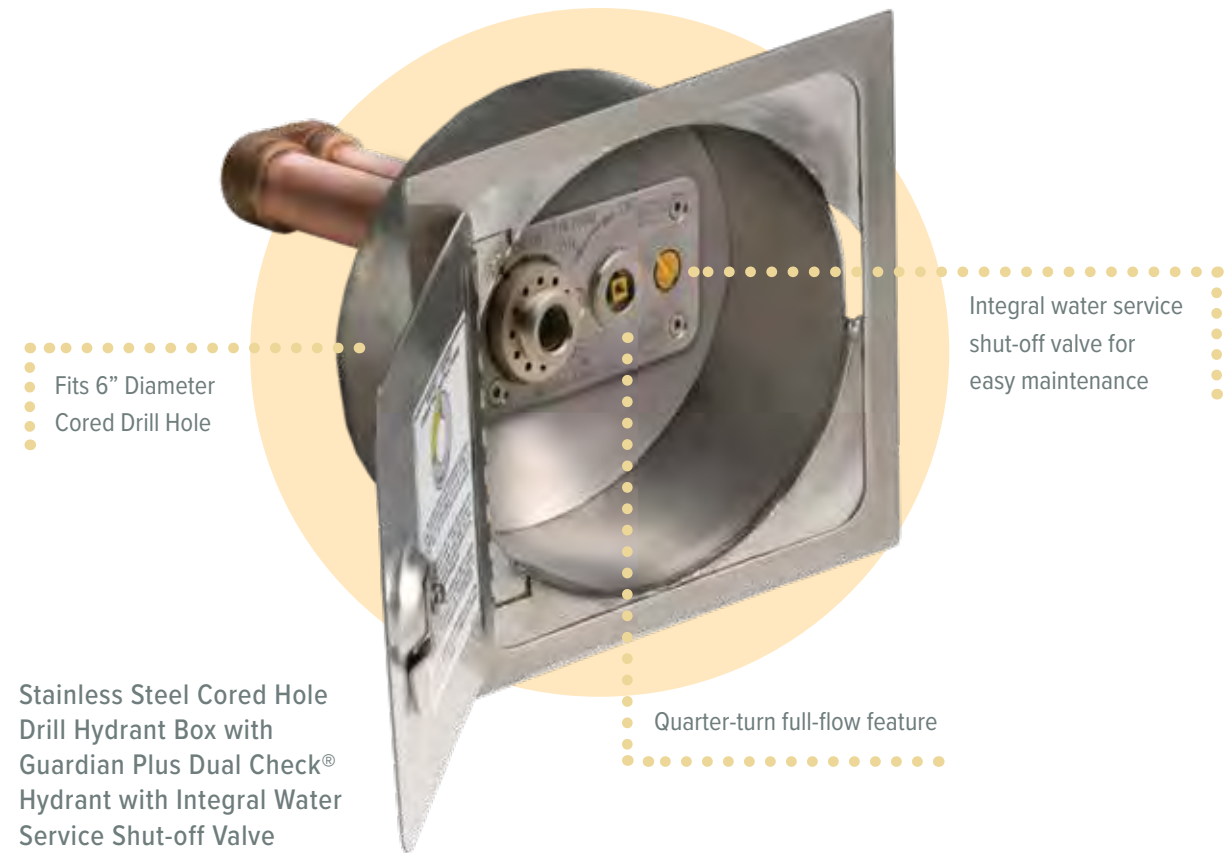

Fits 6" Diameter Cored Drill Hole

Integral water service shut-off valve for easy maintenance

Quarter-turn full-flow feature

Stainless Steel Cored Hole Drill Hydrant Box with Guardian Plus Dual Check® Hydrant with Integral Water Service Shut-off Valve  
Figure No. 5515-R

- Self draining, non-freeze hydrant with dual check valve and integral vacuum breaker
- Frame, cover & housing are made of 16 gauge, type 304 stainless steel
- 3/4" inlet and hose connection
- Locking hinged cover opens 180°
- Flush installation eliminates catch points

### Specifications:

- Complies with ASME A112.21.3M
- Complies with ASSE 1019B, 1052 and 1053
- IAPMO Listed, File #2749







**MORRIS GROUP**  
INTERNATIONAL®



**JAY R. SMITH MFG. CO.®**  
MEMBER OF MORRIS GROUP INTERNATIONAL

2781 Gunter Park Dr. East • Montgomery, AL 36109-1405 • United States  
Tel 334-277-8520 • [www.jrsmith.com](http://www.jrsmith.com)

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

SPM 0926 4/21

**INNOVATIVE SPIRIT AND  
ENGINEERING FOUNDATION**

“What sets us apart from competitors is our engineering and spirit. We have a ‘can-do’ spirit. If you ask us to do something, we will do it or figure out how to do it. That’s the part our customers like, that’s the part we like.”

- Don Morris, President and CEO



**MORRIS GROUP**  
INTERNATIONAL®

**BRANDS BUILT TO LAST!™**

[morriscgroup.co](http://morriscgroup.co)