S0700 (B)

OR VOID DATA

SUPERSEDED ⋖

Р USE

WE CAN ASSUME NO RESPONSIBILITY FOR

WITHOUT NOTICE

AND CHANGE

TO MANUFACTURERS TOLERANCE

윤

DRAWN BY:

FIGURE NUMBER

NONE

9-11-63

APPROVED BY:





LOCATION

LAVATORY SUPPORTS WITH CONCEALED ARMS

FLOOR MOUNTED WITH "PRO-SET" UPRIGHTS


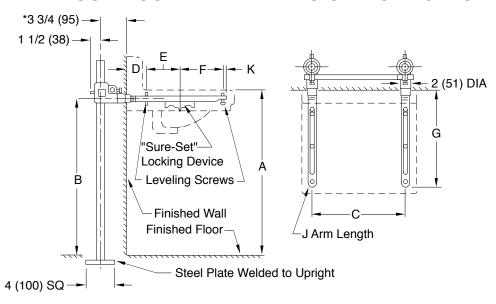


Fig. 0700 . . . FOR HIGH BACK LAVATORIES (shown)

NOTE: The rough-in dimensions listed on this drawing are based on current information available to Jay R. Smith by the fixture manufacturers. We recommend that you verify these dimensions with the fixture manufacturer. We will not accept responsibility for rough-in dimension changes by the fixture manufacturer.

NOTE: Dimensions shown in parentheses are in millimeters.

NOTE: Front leveling screws should protrude 1"(25) above arms.



BASE DETAIL

ROUGHING-IN TABLE

	FIXTURE NAME			N	UMBER		SIZE	
Α	В	С	D	E	F	G	.i	K
				-	•			IX.

NOTE: All support bases must be securely anchored to a rigid floor and/or other rigid substructure with (4) 1/2" bolts furnished by others.

NOTE: *This dimension can be increased when fixture support is to be installed behind the wall. (Specify when required and wall thickness).

KJHG	09/27/10 04/22/09 02/25/02 2/20/01	Updated Drawing Added Note Revised Submittal Revised Submittal	JJ JJ RN	CL AM CR BS	_	VOLUME CUBIC FEET	FIGURE NUMBER
REV.	DATE	DESCRIPTION	BY	CKD. BY			0700