

J
DRAWING NUMBER S1045
SIZE A
SCALE: NONE
DATE: 4-8-86
APPROVED BY: JMcD
CHECKED BY: JD
DRAWN BY: CMB
1045
FIGURE NUMBER


SMITH® JAY R. SMITH MFG. CO.®
MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



LOCATION

SPECIAL PURPOSE ROOF DRAIN

WATER DAM TYPE

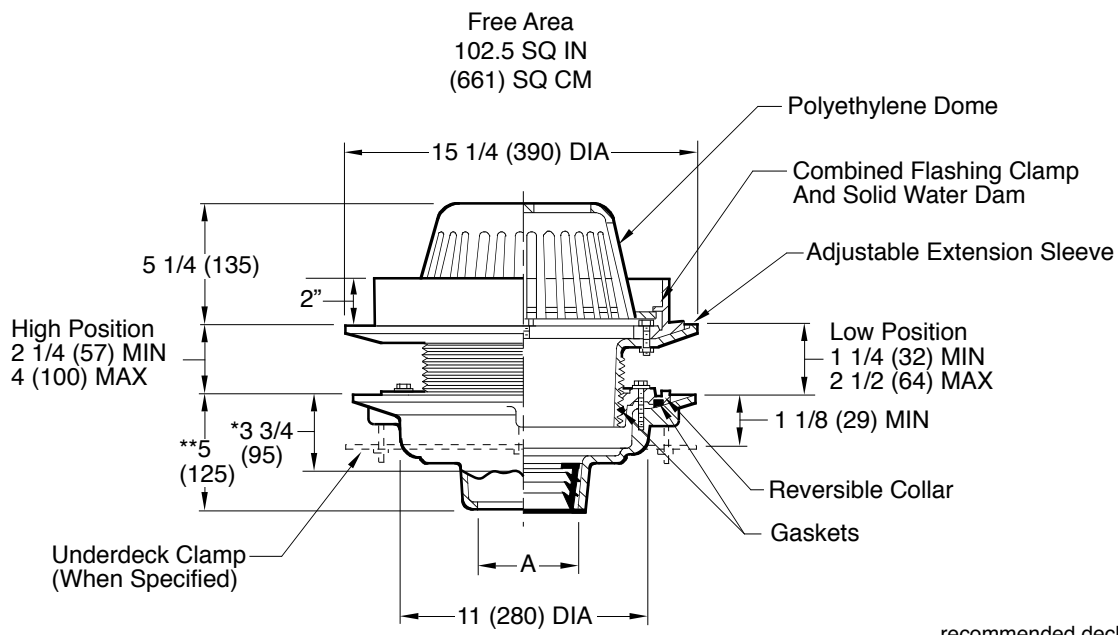

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125), 06(150) or 08(200)

recommended deck opening	
with suffix -R	17 (430) DIA
less suffix -R	14 (355) DIA

* This dimension to internal stop of Speedi-Set Gasket
**Same for Caulk, NO-HUB and Speedi-Set, 3 3/4(95) for Threaded

Fig. 1045C CAULK OUTLET
 Fig. 1045Y NO-HUB OUTLET

REGULARLY FURNISHED:
Duco Cast Iron Body with Adjustable Extension Sleeve, Reversible Collar, Combined Flashing Clamp and Water Dam and Polyethylene Dome.

- VARIATIONS:**
- 2 1/2(64), 3(76) or 4"(100) Water Dams Available -WD
 - Expansion Joint (Specify Fig. 1710)
 - "L" Shaped Underdeck Clamp -CL
 - L Speedi-Set Service Weight 02(50), 03(75) & 04"(100) sizes only
 - LXH Speedi-Set Extra Heavy 02(50), 03(75) & 04"(100) sizes only
 - Secondary Flashing Clamp -C2
 - Sump Receiver -R
 - Underdeck Clamp -C
 - T Threaded Outlet

- OPTIONAL MATERIALS:**
- ▲ Aluminum Dome -AD
 - ▲ Cast Iron Dome -CID
 - ▲ Galvanized Cast Iron Body & Collar -G
 - ▲ Galvanized Cast Iron Dome -CIDG
 - ▲ Rough Bronze Dome -RBD

NOTE: Dimensions shown in parentheses are in millimeters.

▲ **Optional domes' free area are as follows:**
Aluminum 98 (632)
Cast Iron 80 (516)
Bronze 95 (613)

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

J H G F	7-30-19 7-18-19 7-16-19 9-17-15	Removed NOTE Revised Variations Added Dim., Removed Function Added Flow Rate Note	MW MW MW TBW	CL CL BW BW	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 1045
REV.	DATE	DESCRIPTION	BY	CKD. BY			