


PROMENADE DECK DRAIN FOR INSULATED ROOF DECKS

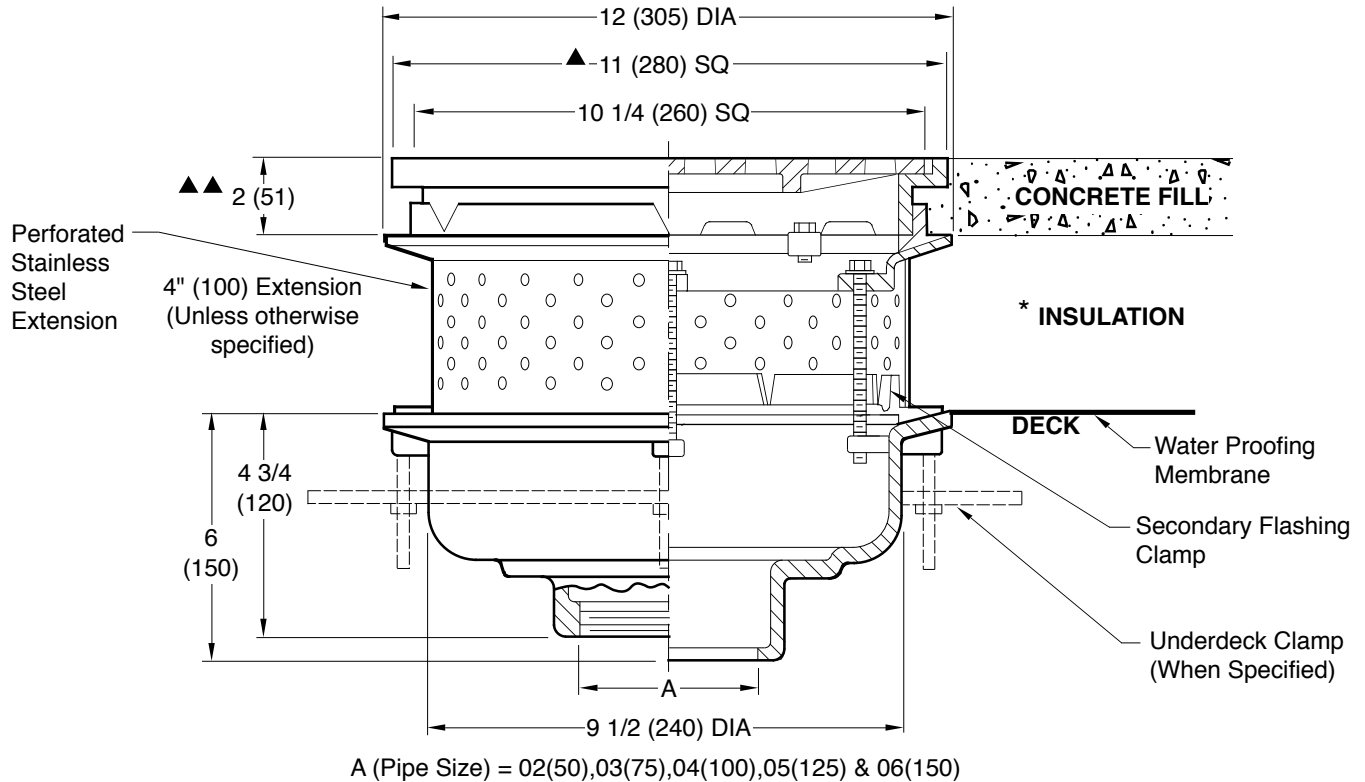

A (Pipe Size) = 02(50),03(75),04(100),05(125) & 06(150)

Fig. 1459C-EPSS CAULK OUTLET
 Fig. 1459Y-EPSS NO-HUB OUTLET

- ▲ Add 1/4"(6) when bronze top is specified.
- ▲▲ Add 1/8"(3) when bronze top is specified.

recommended deck opening

with suffix -R	13 (330) DIA
less suffix -R	11 (280) DIA

REGULARLY FURNISHED:
 Duco Cast Iron Body and 4" (100) Perforated Stainless Steel Extension with Secondary Flashing Clamp and Secured Square Hole Grate.

VARIATIONS:

- Expansion Joint (Specify Fig. 1710)
- Extension (Specify Height) -E
- "L" Shaped Underdeck Clamp -CL
- L Speedi-Set Service Weight
02(50), 03(75) & 04"(100) sizes only
- LXH Speedi-Set Extra Heavy
02(50), 03(75) & 04"(100) sizes only
- NO-HUB Adaptor (Specify Fig. 2646Y)
- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Grate -U
- T Threaded Outlet

OPTIONAL MATERIALS:

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

* On some systems this layer includes a layer of pea gravel and a layer of insulation.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S1459-EPSS

SIZE
A

SCALE:
NONE

DATE:
11/09/04

APPROVED BY:
AM

CHECKED BY:
AM

DRAWN BY:
JJ

1459-EPSS

FIGURE NUMBER

REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS

VOLUME CUBIC FEET

FIGURE NUMBER

1459-EPSS



WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE