

F


SMITH® JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com



MEMBER OF:

LOCATION

ROOFTOP PLANTING AREA DRAIN

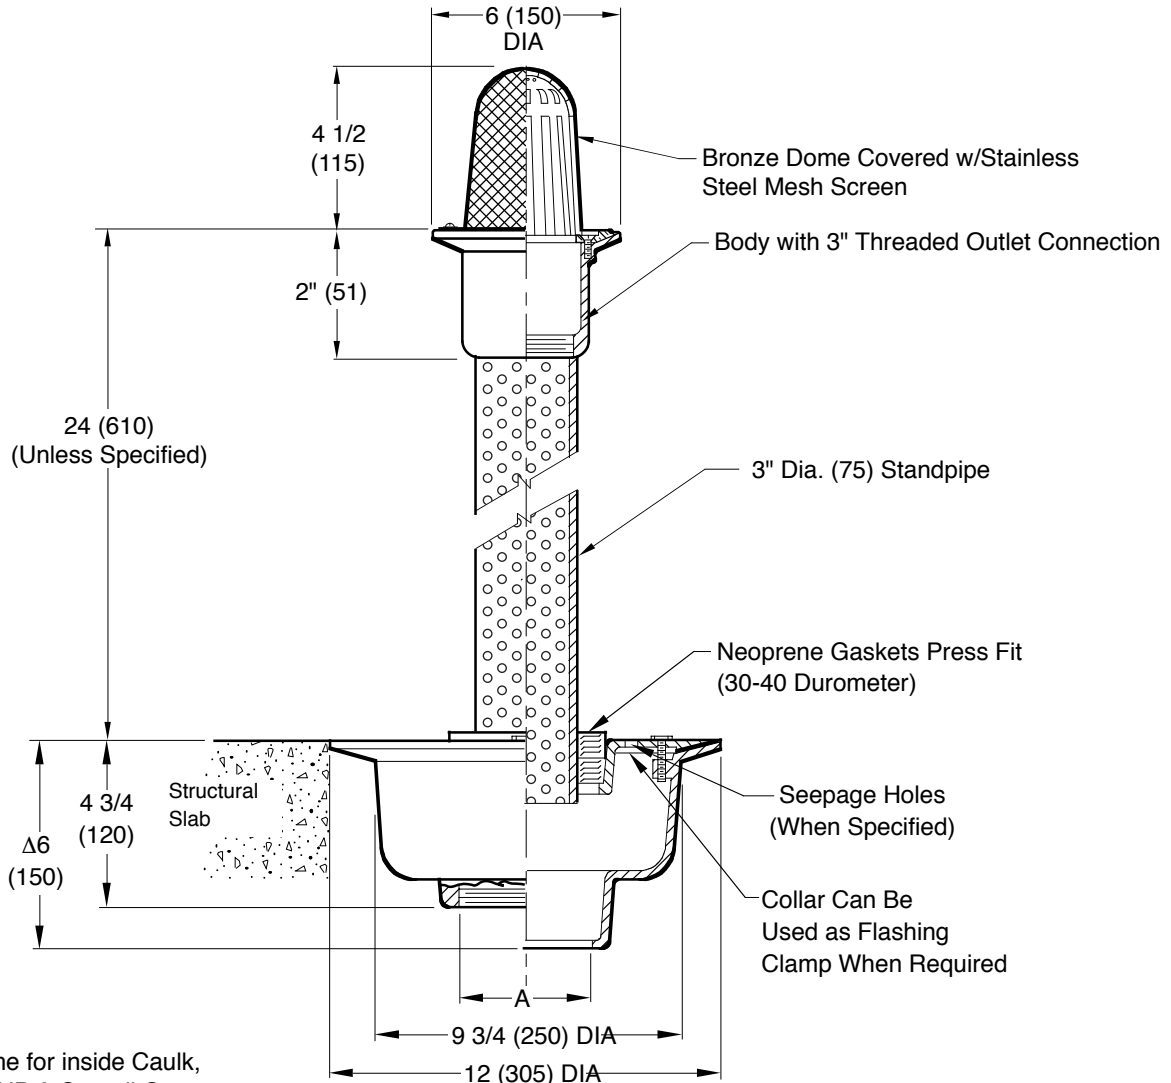

Δ Same for inside Caulk, NO-HUB & Speedi-Set

A (Pipe Size) = 02(50), 03(75), 04(100), 05(125) or 06(150)

Fig. 1906 . . . NO-HUB Outlet
 (Threaded or Inside Caulk Outlet)
 When Specified

REGULARLY FURNISHED:

Duco Cast Iron Upper Body with Bronze Flashing Clamp, Secured Bronze Dome with Stainless Steel Mesh Screen. Duco Cast Iron Lower Body with Combined Flashing Clamp, Perforated Bronze Standpipe and Neoprene Isolation Gasket.

VARIATIONS:

- Sump Receiver -R
- Underdeck Clamp -C
- Vandal Proof Dome -U
- Solid Standpipe

OPTIONS:

- Cast Iron Standpipe
- Galvanized - G

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER
S1906

SIZE
A

SCALE:
NONE

DATE:
3-10-05

APPROVED BY:
AM

CHECKED BY:
AM

DRAWN BY:
RN

1906

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

F	4-12-16	Revised Variations	TBW	BW	WEIGHT	VOLUME	FIGURE NUMBER
E	4-30-13	Revised Drawing	TBW	BW	POUNDS	CUBIC FEET	1906
D	04/19/10	Added 24 unless specified	JJ	TK			
C	4-1-2010	Revised 2" to 3" Standpipe	RN	AM			
REV.	DATE	DESCRIPTION	BY	CKD. BY			