


# FLOOR DRAINS

## 12" (305) Tractor Grate, (Medium Duty) with Sediment Bucket

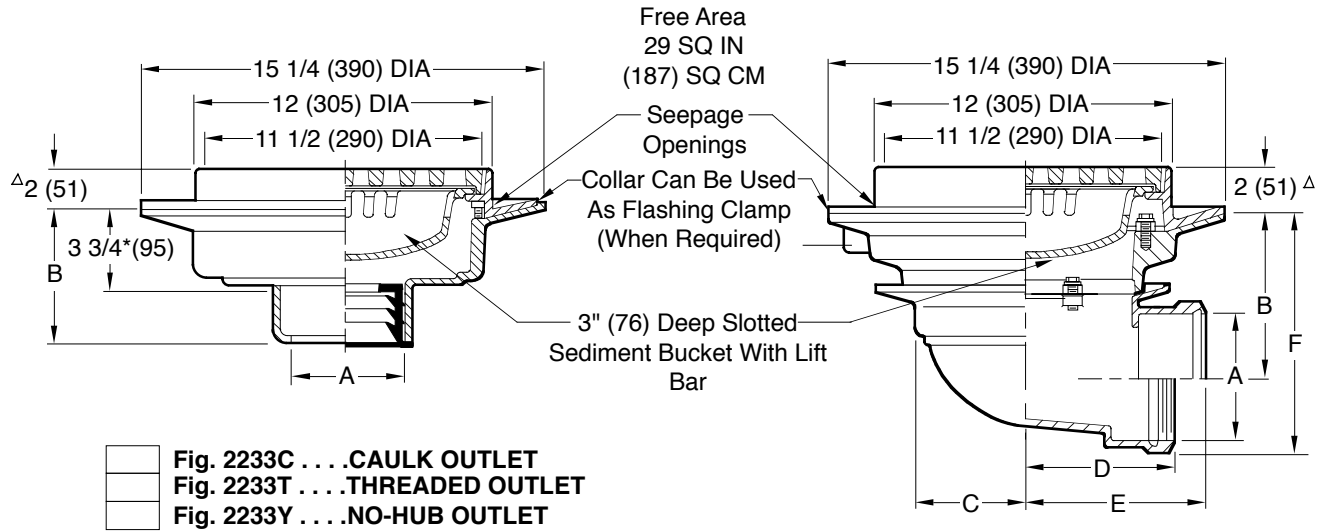

- Fig. 2233C . . . .CAULK OUTLET
- Fig. 2233T . . . .THREADED OUTLET
- Fig. 2233Y . . . .NO-HUB OUTLET

- Fig. 2238C . . . .CAULK OUTLET
- Fig. 2238T . . . .THREADED OUTLET

A Size	B	
	Caulk, NO-HUB, & Speedi-Set	Threaded
02(50), 03(80), 04(100), 05(125) or 06(150)	5 (125)	3 3/4 (95)
08(200)	6 (150)	5 (125)

A SIZE	02 (50)	03 (80)	04 (100)	05 (125)	06 (150)
B	6 7/8 (175)	6 3/8 (162)	5 7/8 (149)	5 (125)	4 1/2 (115)
C	4 3/4 (120)	4 3/4 (120)	4 3/4 (120)	6 1/4 (160)	6 1/4 (160)
D	6 (150)	6 (150)	6 (150)	6 5/8 (168)	6 7/8 (175)
E	7 1/4 (185)	7 1/2 (190)	7 3/4 (195)	7 3/4 (195)	7 3/4 (195)
F	8 5/8 (219)	8 3/4 (220)	8 3/4 (220)	8 1/2 (215)	8 1/2 (215)

**REGULARLY FURNISHED:**

Duco Cast Iron Body and Flashing Collar with Cast Iron Tractor Grate and Slotted Sediment Bucket.

\*This Dimension to Internal Stop of Speedi-Set Gasket.

Δ Add 1/8"(3) when bronze top is specified

\*\*For Heavy Duty: Specify Ductile Iron Grate-M

**VARIATIONS:**

- L Speedi-Set Service Weight 02(50), 03(75) & 04"(100) sizes only (Fig. 2233 only)
- LXH Speedi-Set Extra Heavy 02(50), 03(75) & 04"(100) sizes only (Fig. 2233 only)
- NO-HUB Adaptor (Specify Fig. 2646Y) (Fig. 2238 only)
- Square Top -S
- Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19) (Fig. 2233 only)
- Vandal Proof Grate -U
- Heel Proof Grate -Q45
- Quad Close Trap Seal (Specify Fig. 2692) (Fig. 2233 Only)

**OPTIONAL MATERIALS:**

- Ductile Iron Grate -M
- Galvanized Cast Iron -G
- Nickel Bronze Top -NB
- Polished Bronze Top -PB

**NOTE:** Fig. 2238 in 02(50), 03(80) & 04"(100) sizes require a transition collar (as shown in above illustration) which fits between the body & collar. 05(125) & 06"(150) sizes do not require transition collar.

**NOTE:** Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER S2233

SIZE A

SCALE: NONE

DATE: 5-17-85

APPROVED BY: TD

CHECKED BY: TD

DRAWN BY: PJ

2233, 2238

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

N	7-21-21	Removed Load Rating	KK	JT	WEIGHT	VOLUME	FIGURE NUMBER
M	10-26-20	Revised A Size Chart	MW	CL	POUNDS	CUBIC FEET	<b>2233, 2238</b>
L	9-11-19	Rev. Fig Opt., Var. & Note	MW	JM			
K	7-22-19	Added Load Rating	MW	JM			
REV.	DATE	DESCRIPTION	BY	CKD. BY			