




JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com

LOCATION

ELECTRONIC TRAP PRIMING DEVICE

WITH SURFACE MOUNT ENCLOSURE

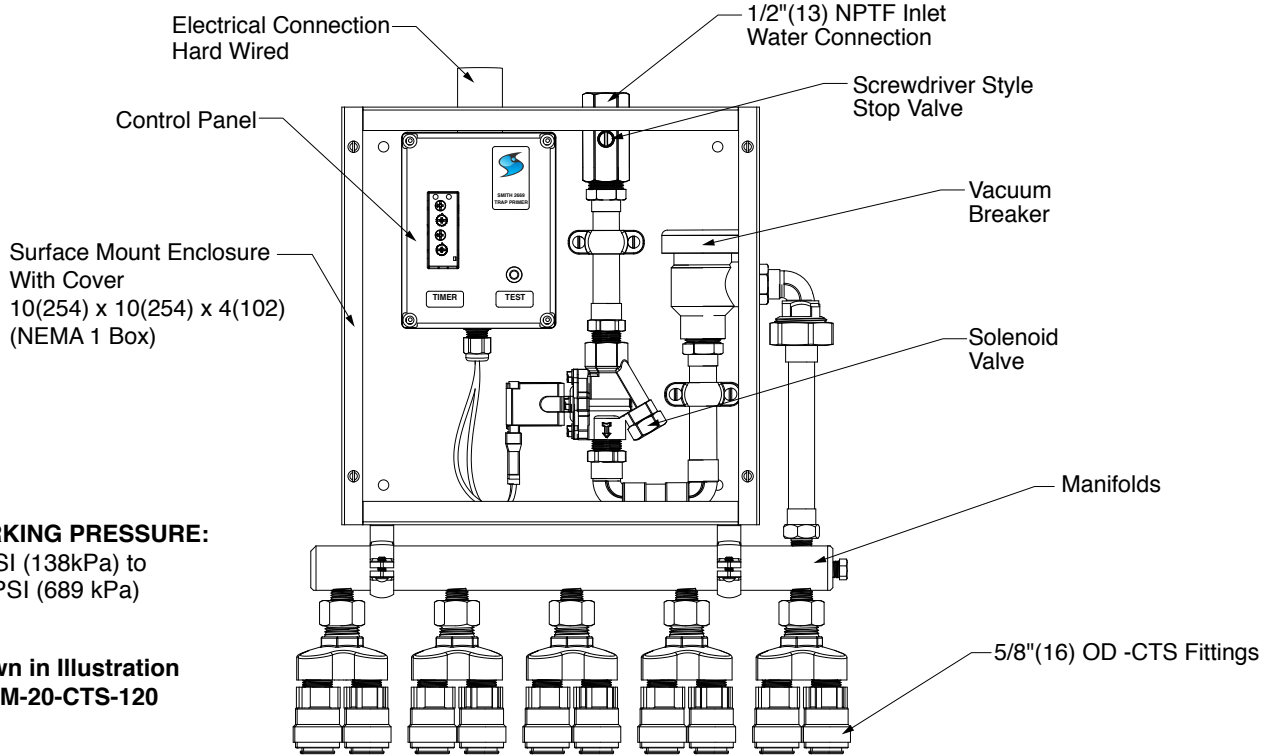

WORKING PRESSURE:
 20 PSI (138kPa) to
 100 PSI (689 kPa)

Shown in Illustration
271SM-20-CTS-120

REGULARLY FURNISHED:

A Surface Mount, Floor Drain Trap Priming Device consisting of Enclosure with Cover, a Solenoid Valve, Vacuum Breaker, a Timer (factory preset to discharge once per twenty-four-hour period) and a Manifold with multiple Push Connect Discharge Ports (specify number of outlets) allowing the unit to serve multiple floor drain traps. This device is supplied with hardwired type electrical connections and has provisions to interface with a Building Management System (BMS) where applicable.

SPECIFY AC VOLTAGE: HARDWIRED

- 24V -024
- 120V -120
- 240V -240

SPECIFY NUMBER OF OUTLETS:

- 04 08 12 16 20

NOTES:

- All wiring must follow and be in accordance with National, State and Local Electrical Codes.
- The outlet of the trap primer valve shall be a minimum of 12"(305) above the finished floor before a 90° elbow can be installed. See Installation Instructions.
- Dimensions shown in parentheses are millimeters unless otherwise specified.
- Unit must be installed level and be accessible.

271SM-XX-CTS-XXX


Figure Number
 Surface Mount
 Number of Outlets
 Voltage

VARIATIONS:

- Vandal Proof Cover Screws -U
- Interface with Facilities Energy Management Systems -EMS



FILE 3253



UL 1951
 CSA C22.2 NO 68
 CSA C22.2 NO 14
 FILE E10084



STD. 1044

DRAWING NUMBER
S271SM-CTS SERIES

SIZE
A

SCALE:
NONE

DATE:
5-15-19

APPROVED BY:
JM

CHECKED BY:
JM

DRAWN BY:
TBW

271SM-CTS SER.

FIGURE NUMBER

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

| | | | | | | | |
|------|----------|-------------------------------|-----|---------|--------|------------|--|
| H | 12-15-20 | Revised Reg. Furn./Callout | TBW | CL | WEIGHT | VOLUME | FIGURE NUMBER 271SM-CTS SERIES |
| G | 4-29-20 | Revised ASSE/UPC Conformities | MW | CL | POUNDS | CUBIC FEET | |
| F | 4-23-20 | Added UPC | MW | CL | | | |
| E | 2-28-20 | Added IAPMO EGS Conformity | MW | CL | | | |
| REV. | DATE | DESCRIPTION | BY | CKD. BY | | | |