


SANI-CEPTOR® ACID RESISTANT COATED FLOOR & INDIRECT WASTE DRAIN

REFRIGERATOR DRAIN WITH RECESSED GRATE

FUNCTION: Used to receive waste from refrigerators and similar appliances. Purging of the sump by the flushing action prevents contamination.

Free Area
 7.20 SQ IN
 (46) SQ CM

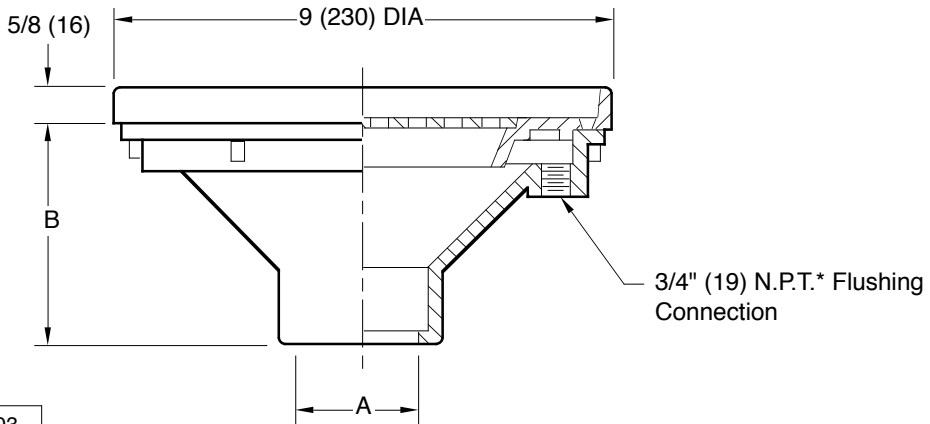

A SIZE	0150 (40)	02 (50)	03 (80)
B	4 1/2 (115)	4 1/2 (115)	3 1/2 (89)

Fig. 3365C CAULK OUTLET
 Fig. 3365T THREADED OUTLET

*NOTE: The potable water supply to which a flushing type of drain is connected must be protected by a suitable vacuum breaker.

ΔNOTE: For water supply control boxes see Figs. 3380 and 3385

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:
 Cast Iron Body with Acid Resistant Coated Interior and Nickel Bronze Top.

VARIATIONS:
 Water Supply Control Box Δ
 NO HUB Outlet (specify Fig. 2646Y Adaptor)

OPTIONAL MATERIALS:
 All Duco Cast Iron Body -CI

C
 DRAWING NUMBER S3365
 SIZE A
 SCALE: NONE
 DATE: 9-19-85
 APPROVED BY: SJM
 CHECKED BY: JD
 DRAWN BY: PJ
 3365
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
	12-7-98	Revised Variations	TBW	DG			3365
	8-23-96	Added Millimeters	EMB	BS			
	12-10-93	Submittal Update	EMB	BS			