S3610

4

NONE

9-19-85

APPROVED BY SJM

CHECKED BY 9 DATA

SUPERSEDED OR VOID

Р

USE

RESPONSIBILITY FOR

9

CAN ASSUME

NOTICE

WITHOUT

AND CHANGE

TOLERANCE VGD

TO MANUFACTURERS

3610,3615,3620,3625


IGURE NUMBER

DRAWING NUMBEF

FUNNEL-CEPTOR® INDIRECT WASTE DRAINS

WITH ADJUSTABLE ROUND TOPS MEDIUM DUTY GRATE WITH ROUND FUNNEL

FUNCTION: Used to receive the drip, condensate or waste water from indirect waste lines. The funnel prevents splashing and directs the waste into the drain. The exposed portion of grate serves as drain for any other waste on the floor. The funnel is attached to the grate by means of concealed screws and it may be moved to any grate location desired. The round funnel is recommended for single pipe use only. Adjustable top permits accurate positioning of the grate, as necessary, to meet the

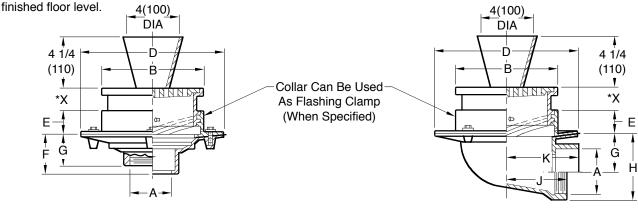

8 1/2"(215) 12"(305) · · · TOP SIZE = B DIA · · · · · · 8 1/2"(215) 12"(305)

Fig. . . . 3610C . . . 3615C CAULK OUTLET. Fig. . . . 3620C . . . 3625C

Fig. . . . 3610T . . . 3615T . . . THREADED OUTLET. . . Fig. . . . 3620T . . . 3625T

BOTTOM OUTLET DIMENSIONS

Α	В	D			G	*X	
SIZE	DIA	DIA	E	F	THD.	MIN	MAX
02(50),03(80),	8 1/2	11 1/2	2	3 3/4	2	1 1/4	2 3/4
04(100)	(215)	(290)	(50)	(95)	(50)	(32)	(70)
02(50),03(80),04(100),	12	15 1/4	2 1/2	5	3 3/4	1 5/8	2 7/8
05(125) or 06(150)	(305)	(390)	(64)	(125)	(95)	(41)	(73)

^{*}Add 1/4" (6) when bronze top is specified.

SIDE OUTLET DIMENSIONS

Α	В	D	E	G	Н	J	K	*X	
SIZE	DIA	DIA						MIN	MAX
02(50)	8 1/2	12	2	4 1/4(110)	6	4	5 1/2	1 1/4	2 3/4
03(80)	(215)	(305)	(50)	3 3/4(95)	(150)	(100)	(140)	(32)	(70)
04(100)				3 1/4(83)					
02(50)	12	15 1/4	2 1/2	6 1/2(165)	9	6	6 3/4	1 5/8	2 7/8
03(80)	(305)	(390)	(64)	6(150)	(230)	(150)	(170)	(41)	(73)
04(100)				5 1/2(140)					
05(125)	12	15 3/4	2 1/2	5(125)	9	6 3/4	7 3/4		
06(150)	(305)	(400)	(64)	4 1/2(115)	(230)	(170)	(195)		

REGULARLY FURNISHED:

Duco Cast Iron Flanged Receptor and Flashing Collar with Adjustable Top, Bar Grate and Funnel.

NOTE: Dimensions shown in parentheses are in millimeters.

VARIATIONS:

L Speedi-Set Service Weight (Available on Bottom Outlet Drains) 2(50), 3(80) & 4"(100) sizes only

LXH Speedi-Set Extra Heavy (Available on Bottom Outlet Drains)

2(50), 3(80) & 4"(100) sizes only

Secured Grate -SG

Sediment Bucket -B

6"(150) Dia. Funnel (Fig. 3581) -6 6(150) x 2 1/2(64) x 1"(25) High Oval

Funnel (Fig. 3590)

Vandal Proof Secured Grate -U

Y NO-HUB Outlet

(Available on Bottom Outlet Drains)

NOTE: 2(50), 3(80) & 4"(100) sizes with 15 1/4(390) "D" Dim. require a transition collar (not shown in above illustration) which fits between the body and collar. Above illustration is typical for the 5(125) & 6"(150) sizes (3625 only).

OPTIONAL MATERIALS:

Chrome Plated Grate and Funnel -CP Nickel Bronze Grate and Funnel -NB Polished Bronze Grate and Funnel -PB

WEIGHT VOLUME FIGURE NUMBER 11-27-95 Added Millimeters **EMB** BS 3610, 3615, 3620, 3625 POUNDS CUBIC FEFT B 7-22-94 **Submittal Update** BŠ **EMB** Chg'd Dim F/Fig. 3625 2-28-91 **EMB** JCS REV. DATE **DESCRIPTION** BY CKD. BY