S3650

4

NONE

9-19-85

APPROVED BY

SJM

SUPERSEDED OR VOID DATA

USE OF

9

**CAN ASSUME** 

NOTICE

**др** МТНОИТ

AND CHANGE

VGD TOLERANCE

TO MANUFACTURERS

SUBJECT

3650,3655,3660,3665

IGURE NUMBER

DRAWING NUMBER

MEMBER OF MORRIS GROUP INTERNATIONAL
POST OFFICE BOX 3237
MONTGOMERY, ALABAMA 36109-0237 (USA)
TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmi




LOCATION

# FUNNEL-CEPTOR® INDIRECT WASTE DRAINS

# WITH ADJUSTABLE ROUND TOPS MEDIUM DUTY GRATE WITH OVAL FUNNEL

**FUNCTION:** Used to receive the drip, condensate or waste water from indirect waste lines. The funnel prevents splashing and directs the waste into the drain. The exposed portion of grate serves as drain for any other waste on the floor. The funnel is attached to the grate by means of concealed screws and it may be moved to any grate location desired. The oval funnel is ideal for multiple pipe use while the adjustable top permits accurate positioning of the grate, as necessary, to meet the finished floor level.

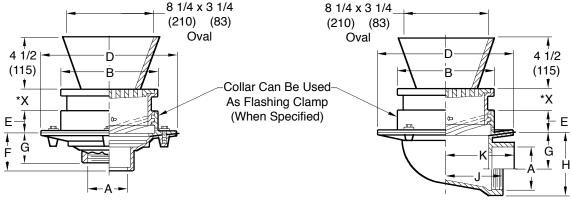

8 1/2"(215) 12"(305) . . . TOP SIZE = B DIA . . . . . . 8 1/2"(215) 12"(305) Fig. . . . 3650C . . . 3655C . . . . CAULK OUTLET . . . . Fig. . . . 3660C . . . 3665C Fig. . . . 3650T . . . 3655T . . . THREADED OUTLET . . . Fig. . . . 3660T . . . 3665T

# **BOTTOM OUTLET DIMENSIONS**

#### SIDE OUTLET DIMENSIONS

Α	В	D	D		G	*X	
SIZE	DIA	DIA	E	F	THD.	MIN	MAX
02(50),03(80),	8 1/2	11 1/2	2	3 3/4	2	1 1/4	2 3/4
04(100)	(215)	(290)	(50)	(95)	(50)	(32)	(70)
02(50),03(80),04(100),	12	15 1/4	2 1/2	5	3 3/4	1 5/8	2 7/8
05(125) or 06(150)	(305)	(390)	(64)	(125)	(95)	(41)	(73)

A	В	D	L	G	н	J	K	"X	
SIZE	DIA	DIA						MIN	MAX
02(50)	8 1/2	12	2	4 1/4(110)	6	4	5 1/2	1 1/4	2 3/4
03(80)	(215)	(305)	(50)	3 3/4(95)	(150)	(100)	(140)	(32)	(70)
04(100)				3 1/4(83)					
02(50)	12	15 1/4	2 1/2	6 7/8(175)	9	6	6 3/4	1 5/8	2 7/8
03(80)	(305)	(390)	(64)	6 3/8(162)	(230)	(150)	(170)	(41)	(73)
04(100)				5 7/8(149)					
05(125)	12	15 3/4	2 1/2	5(125)	9	6 3/4	7 3/4		
06(150)	(305)	(400)	(64)	4 1/2(115)	(230)	(170)	(195)		
				•				•	

#### **REGULARLY FURNISHED:**

Duco Cast Iron Flanged Receptor and Flashing Collar with Adjustable Top, Bar Grate and Funnel.

**NOTE:** Dimensions shown in parentheses are in millimeters.

### **VARIATIONS:**

L Speedi-Set Service Weight
(Available on Bottom Outlet Drains)
(2(50), 3(80) & 4"(100) sizes only)

LXH Speedi-Set Extra Heavy (Available on Bottom Outlet Drains) (2(50), 3(80) & 4"(100) sizes only)

Secured Grate -SG Sediment Bucket -B

Sediment Bucket -B 6"(150) Dia Funnel (Fig.

6"(150) Dia. Funnel (Fig. 3581) -6 6(150) x 2 1/2(64) x 1"(25) High Oval

Funnel (Fig. 3590)

Vandal Proof Secured Grate -U

Y NO-HUB Outlet (Available on Bottom Outlet Drains) **NOTE:** 2(50), 3(80) & 4"(100) sizes with 15 1/4(390) "D" Dim. require a transition collar (not shown in above illustration) which fits between the body and collar. Above illustration is typical for the 5(125) & 6"(150) sizes (3665 only).

# OPTIONAL MATERIALS:

Chrome Plated Grate and Funnel -CP
 Nickel Bronze Grate and Funnel -NB
 Polished Bronze Grate and Funnel -PB

C B A	11-27-95 7-22-94 2-28-91	Added Millimeters Submittal Update Chg'd Dim F/Fig. 3665	EMB EMB EMB	BS BS JCS	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 3650, 3655,
REV.	DATE	DESCRIPTION	BY	CKD. BY			l 3660.3665