


TERRAZZO FLOOR CLEANOUTS WITH "TWIS-TO-FLOOR®" ADJUSTABLE TOPS

ROUND NICKEL BRONZE TOP WITH TERRAZZO RECESS

FUNCTION: Used in terrazzo and similar poured floors bearing foot and medium load wheeled traffic. The recess is filled with the floor material, presenting an unobtrusive appearance. Lock-in design firmly holds floor material in recess.

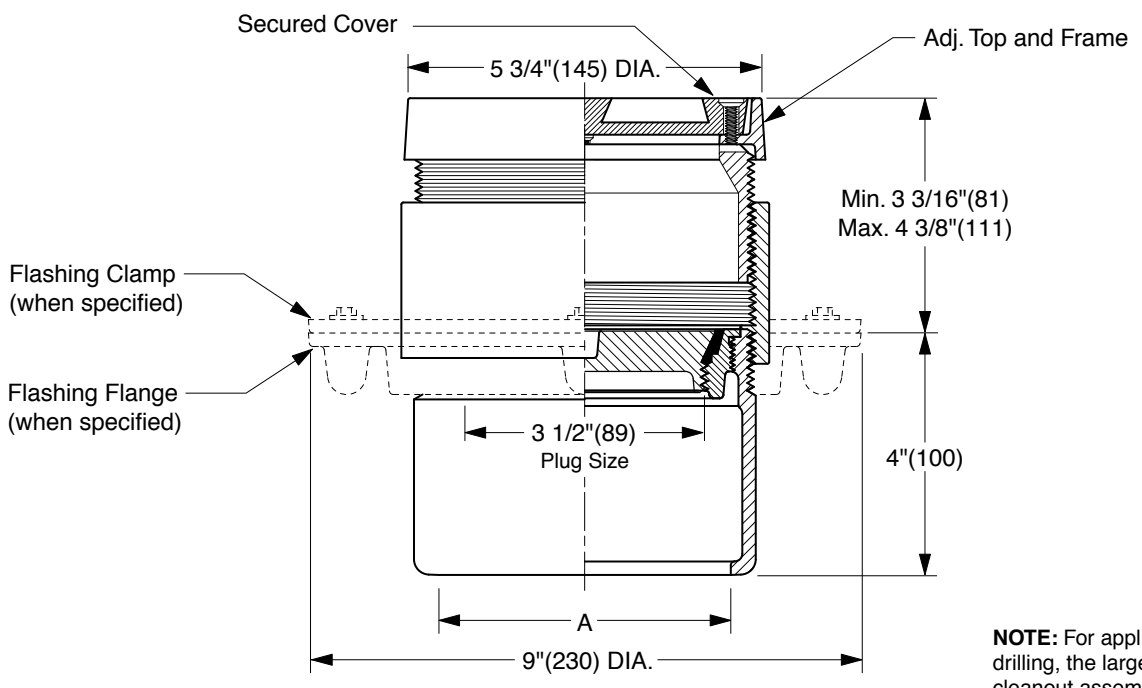

NOTE: For applications using core drilling, the largest diameter of the cleanout assembly is 6 5/16" (160).

TWIS-TO-FLOOR® ADJUSTMENT
 INSIDE CAULK OUTLET
 "A" (Pipe Size) = 02(50), 03(75) or 04(100)

- Fig. 4185C.....Gasket Seal - ABS Plug
- Fig. 4186C.....Gasket Seal - Bronze Plug
- Fig. 4188C.....Taper Thread - Bronze Plug
- Fig. 4189C.....Taper Thread - ABS Plug

(Twis-to-Floor® design shown with gasketed plug.)

NOTE: Dimensions shown in parentheses are in millimeters.

REGULARLY FURNISHED:

Duco Cast Iron Cleanout with Round Adjustable Secured Nickel Bronze Top with 1/2"(13) Terrazzo Recess. Closure Plug Type as Indicated By Figure Number Selected.

VARIATIONS:

- Flashing Flange -F
- Flange with Flashing Clamp -F-C
- Vandal Proof Top -U

OPTIONAL MATERIALS:

- Galvanized Cast Iron -G
- Polished Bronze Top -PB

DRAWING NUMBER S4185
 SCALE: NONE
 DATE: 2-16-70
 APPROVED BY: JM
 CHECKED BY: BH
 DRAWN BY: RK
4185 SERIES
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

L	1-20-22	Removed "C.O." cast in"	KK	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
K	12/17/04	Added Core-Drilling Note	JJ	CL			4185 SERIES
J	07/29/02	Corrected Clamp & Flange view	JJ	CL			
H	10/26/00	New design	JJ	BS			
REV.	DATE	DESCRIPTION	BY	CKD. BY			