



SMITH  
**FLUID**  
CONTROLS®


JAY R.  
**SMITH MFG. CO.®**  
MEMBER OF MORRIS GROUP INTERNATIONAL  
POST OFFICE BOX 3237  
MONTGOMERY, ALABAMA 36109-0237 (USA)  
TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com

LOCATION


# STAINLESS STEEL FIRE RATED WALL ACCESS DOORS



- ① Chip out masonry to clear bolt cover
- ② Concealed hinge
- ③ Door
- ④ Recessed Latch
- ⑤ Interior latch release slide
- ⑥ Closing Spring
- ⑦ Frame

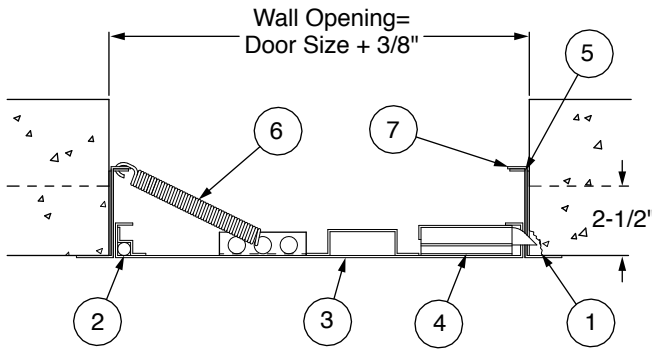

SIDE VIEW

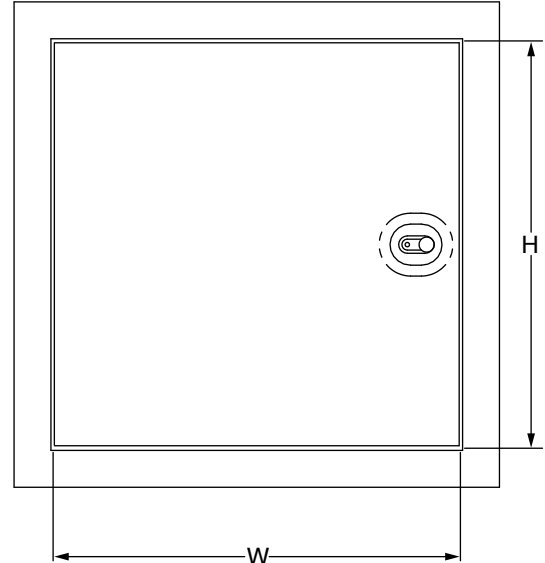

FRONT VIEW

**REGULARLY FURNISHED:**

Doors are fire rated 1-1/2 hours. Door has a heavy duty spring closer to assure positive latching when panel closes. This door is for wall installation only. Door and frame are fabricated from 16 gauge, type 304, stainless steel with a stain finish. Frame is equipped with both masonry anchors and bolt holes to facilitate installation in all types of wall construction. Concealed hinge operates completely out of sight so that only the door and frame is visible. Exterior latch is recessed and is operated using a ring attached to the sliding bolt. Interior latch release slide is included enabling door to be opened from the inside. Finish is a prime coat suitable for painting.

**GUIDE SPECIFICATION:**

Provide 474-SS Series, Fire Rated Access Doors (specify options). Access door and frame shall be fabricated from 16 gauge, type 304, stainless steel with a stain finish. Hinge shall be concealed type. Door shall have a heavy duty spring to provide positive latching when closed, and an interior latch release slide enabling door to be opened from the inside. Exterior latch shall be recessed and operated using ring attached to the sliding bolt. Finish shall be a prime coat suitable for painting.

**STANDARD AVAILABLE SIZES**

NOMINAL DOOR SIZE (W X H-INCHES)	CEILING OPENING (minimum required)	LATCHES	WEIGHT
474-08 x 08SS	8-3/8" x 8-3/8"	1	6 lbs.
474-10 x 10SS	10-3/8" x 10-3/8"	1	7.5 lbs.
474-12 x 12SS	12-3/8" x 12-3/8"	1	9 lbs.
474-12 x 18SS	12-3/8" x 18-3/8"	1	10.5 lbs.
474-12 x 24SS	12-3/8" x 24-3/8"	1	13 lbs.
474-14 x 14SS	14-3/8" x 14-3/8"	1	10 lbs.
474-16 x 16SS	16-3/8" x 16-3/8"	1	12.5 lbs.
474-18 x 18SS	18-3/8" x 18-3/8"	1	15 lbs.
474-20 x 20SS	20-3/8" x 20-3/8"	1	18 lbs.
474-22 x 22SS	22-3/8" x 22-3/8"	1	22 lbs.
474-22 x 30SS	22-3/8" x 30-3/8"	2	28 lbs.
474-24 x 24SS	24-3/8" x 24-3/8"	2	24.5 lbs.
474-24 x 36SS	24-3/8" x 36-3/8"	2	33 lbs.
474-24 x 48SS	24-3/8" x 48-3/8"	2	42 lbs.
474-30 x 30SS	30-3/8" x 30-3/8"	2	33.5 lbs.
474-32 x 32SS	32-3/8" x 32-3/8"	2	35 lbs.
474-36 x 36SS	36-3/8" x 36-3/8"	2	43 lbs.
474-36 x 48SS	36-3/8" x 48-3/8"	2	74 lbs.

**VARIATIONS:**

Cylinder Lock (one per door) -CL

DRAWING NUMBER  
S474-SS Series

SIZE  
A

SCALE:  
NONE

DATE:  
6-25-19

APPROVED BY:  
JM

CHECKED BY:  
JM

DRAWN BY:  
MW

**474-SS Series**

FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY
D	02-26-20	Revised Regularly Furnished	TBW	JM
C	02-25-20	Revised Reg. Furn., Guide Specs.	MW	CL
B	01-31-20	Rem. Satin Finish Opt. in Var.	MW	CL
A	01-31-20	Rev. Nor. Door Size Format	MW	JM

WEIGHT POUNDS	VOLUME CUBIC FEET
---------------	-------------------

FIGURE NUMBER  
**474-SS Series**