

D


JAY R. SMITH MFG. CO.®

 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com


MEMBER OF:

LOCATION

DRAWING NUMBER
S4768SIZE
ASCALE:
NONEDATE:
3-9-15APPROVED BY:
SJMCHECKED BY:
JMDRAWN BY:
TBW

4768

FIGURE NUMBER


WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE


FIRE RATED WALL ACCESS DOORS



- ① Chip out masonry to clear bolt cover
- ② Concealed hinge
- ③ Door
- ④ Recessed Latch
- ⑤ Interior latch release slide
- ⑥ Closing Spring
- ⑦ Frame

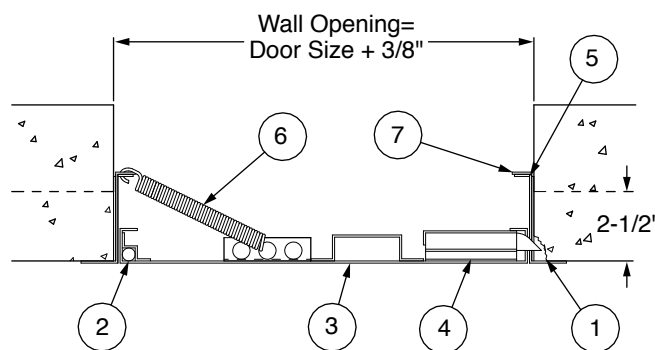

SIDE VIEW

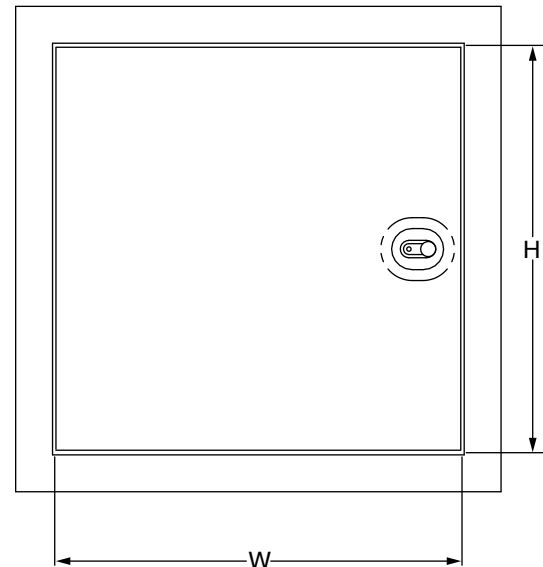

FRONT VIEW

REGULARLY FURNISHED:

Doors are fire rated 1-1/2 hours. Door has a heavy duty spring closer to assure positive latching when panel closes. This door is for wall installation only. Door and frame are fabricated from 16 gage, galvanized steel with a prime coat finish. Door has a heavy duty spring to assure positive latching. Frame is equipped with both masonry anchors and bolt holes to facilitate installation in all types of wall construction. Concealed hinge operates completely out of sight so that only the door and frame is visible. Exterior latch is recessed and is operated using a ring attached to the sliding bolt. Interior latch release slide is included enabling door to be opened from the inside. Finish is a prime coat suitable for painting.

GUIDE SPECIFICATION:

Provide 4768 Series, Fire Rated Access Doors (specify options). Access door and frame shall be fabricated from 16 gage, galvanized steel with a prime coat finish. Hinge shall be concealed type. Door shall have a heavy duty spring to provide positive latching when closed, and an interior latch release slide enabling door to be opened from the inside. Exterior latch shall be recessed and operated using ring attached to the sliding bolt. Finish shall be a prime coat suitable for painting.

STANDARD AVAILABLE SIZES

Special sizes available upon request

NOMINAL DOOR SIZE (W X H)	WALL OPENING (minimum required)	LATCHES	WEIGHT
4768 8" x 8"	8-3/8" x 8-3/8"	1	6 lbs.
4768 10" x 10"	10-3/8" x 10-3/8"	1	7.5 lbs.
4768 12" x 12"	12-3/8" x 12-3/8"	1	9 lbs.
4768 12" x 18"	12-3/8" x 18-3/8"	1	10.5 lbs.
4768 12" x 24"	12-3/8" x 24-3/8"	1	13 lbs.
4768 14" x 14"	14-3/8" x 14-3/8"	1	10 lbs.
4768 16" x 16"	16-3/8" x 16-3/8"	1	12.5 lbs.
4768 18" x 18"	18-3/8" x 18-3/8"	1	15 lbs.
4768 20" x 20"	20-3/8" x 20-3/8"	1	18 lbs.
4768 22" x 22"	22-3/8" x 22-3/8"	1	22 lbs.
4768 22" x 30"	22-3/8" x 30-3/8"	2	28 lbs.
4768 24" x 24"	24-3/8" x 24-3/8"	2	24.5 lbs.
4768 24" x 36"	24-3/8" x 36-3/8"	2	33 lbs.
4768 24" x 48"	24-3/8" x 48-3/8"	2	42 lbs.
4768 30" x 30"	30-3/8" x 30-3/8"	2	33.5 lbs.
4768 32" x 32"	32-3/8" x 32-3/8"	2	35 lbs.
4768 36" x 36"	36-3/8" x 36-3/8"	2	43 lbs.
4768 36" x 48"	36-3/8" x 48-3/8"	2	74 lbs.

VARIATIONS:

- Cylinder Lock (one per door) -CL
- Stainless Steel Construction -SS
- Type 304 No. 4 Satin Finish

REV.	DATE	DESCRIPTION	BY	CKD. BY
D	4-13-21	Changed ceiling to wall opening	KK	JT
C	5-21-19	Revised Table	MW	JM
B	7-2-18	Revised Regularly Furnished	TBW	SJM
A	6-18-15	Revised Table	TBW	SJM

WEIGHT
POUNDSVOLUME
CUBIC FEET

FIGURE NUMBER

4768


WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov