

DUCT ACCESS DOORS

DRAWING NUMBER
S4775

SIZE
A

SCALE:
NONE

DATE:
3-11-15

APPROVED BY:
SJM

CHECKED BY:
JM

DRAWN BY:
TBW

4775


FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA


DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE



- ① Tabs
- ② Concealed hinge
- ③ Cam latch

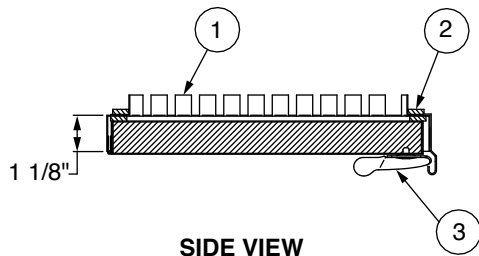

SIDE VIEW

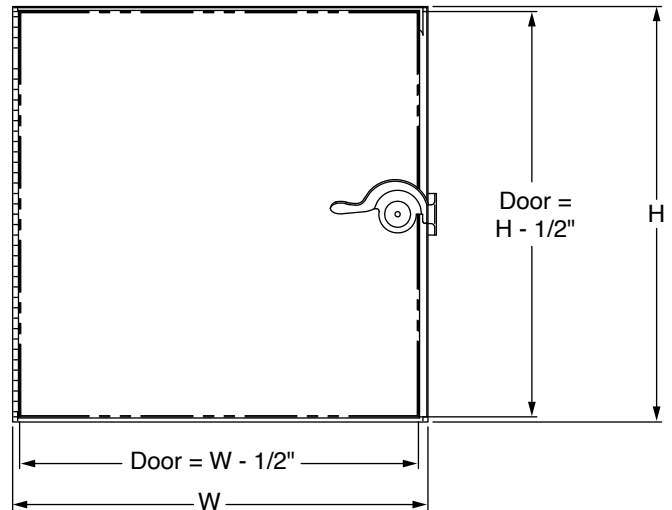

FRONT VIEW

REGULARLY FURNISHED:

Doors are designed to provide access to equipment installed within ducts. The door panels are insulated and gaskets between the panel and frame will assure tight seals without obstruction in the air system. Door and frame are fabricated from 24 gage, galvanized steel. Door is 1" thick, double wall construction and insulated. Frame is provided with knock-over tabs and easily attached to the duct. Hinge is continuous piano type. Cam latch is self-tightening and hand operated.

GUIDE SPECIFICATION:

Provide 4775 Series, Duct Access Doors (specify options). Access door and frame shall be fabricated from 24 gage, galvanized steel. The door shall be 1" thick, double wall construction and insulated. Frame shall have knock-over edges for attaching to duct. Hinge shall be a continuous piano type. Cam latch shall be self-tightening and hand operated.

STANDARD AVAILABLE SIZES

Special sizes available upon request

	NOMINAL DOOR SIZE (W X H)	DUCT OPENING	CAM LATCHES	WEIGHT
	4775 6" x 6"	4-3/4" x 4-3/4"	1	1.5 lbs.
	4775 8" x 8"	6-3/4" x 6-3/4"	1	2.5 lbs.
	4775 10" x 10"	8-3/4" x 8-3/4"	1	3 lbs.
	4775 12" x 12"	10-3/4" x 10-3/4"	1	4 lbs.
	4775 14" x 14"	12-3/4" x 12-3/4"	2	5 lbs.
	4775 16" x 16"	14-3/4" x 14-3/4"	2	7 lbs.
	4775 18" x 18"	16-3/4" x 16-3/4"	2	8 lbs.
	4775 20" x 20"	18-3/4" x 18-3/4"	2	11 lbs.
	4775 24" x 24"	22-3/4" x 22-3/4"	2	13 lbs.

VARIATIONS:

Cam Latch - Non Hinged -CNH

REV.	DATE	DESCRIPTION	BY	CKD. BY
A	9-1-20	Revised Wording	MW	JT

WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
		4775