


B  
 DRAWING NUMBER **S4777**  
 SIZE **A**  
 SCALE: **NONE**  
 DATE: **3-16-15**  
 APPROVED BY: **SJM**  
 CHECKED BY: **JM**  
 DRAWN BY: **TBW**  
**4777**  
 FIGURE NUMBER

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA  
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE


# DRYWALL BEAD ACCESS DOORS



- ① Drywall
- ② Concealed pivoting rod hinge
- ③ Mounting holes
- ④ Screwdriver operated latch
- ⑤ Drywall joint compound
- ⑥ Door

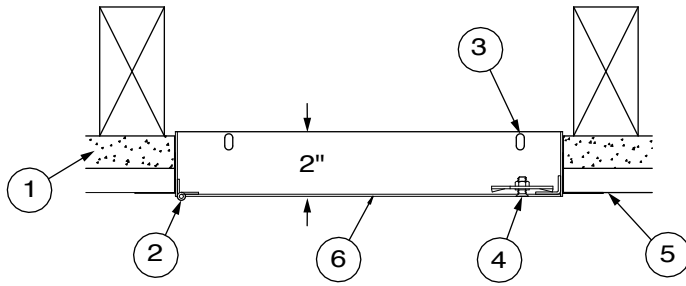

**SIDE VIEW**

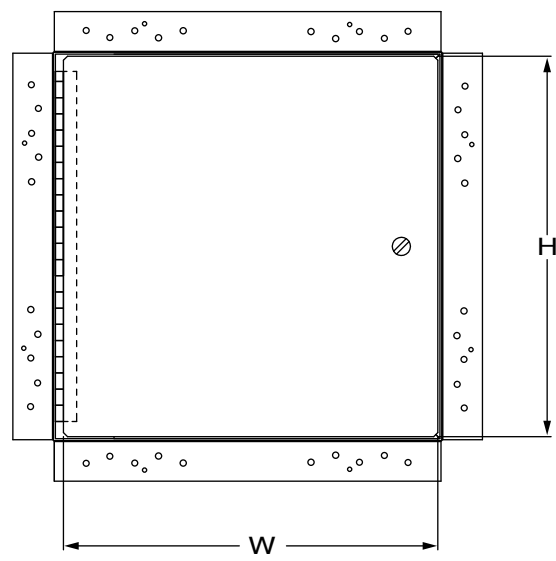

**FRONT VIEW**

**REGULARLY FURNISHED:**

Doors are designed for flush installation in drywall surfaces. Door features a concealed hinge that prevents distortion and closes door squarely. Door and frame are fabricated from 16 gage, galvanized steel with a prime coat finish. Frame has 1/4" mounting holes positioned to allow anchoring directly to studs to assure a secure mounting. A drywall bead on the frame allows the drywall joint compound to be applied over the bead at the same time as the joints and corners. Flange has prepunched holes to provide grip for the joint compound and facilitate fastening the flange to framing members with drywall screws. Concealed pivoting rod hinge prevents distortion and closes door squarely. Doors 24" or larger are provided with a continuous piano hinge. Latch is screwdriver operated. Finish is a prime coat suitable for painting.

**GUIDE SPECIFICATION:**

Provide 4777 Series, Drywall Bead Access Doors (specify options.) Access door and frame shall be fabricated from 16 gage, galvanized steel with a prime coat finish. Frame shall have mounting holes positioned to allow anchoring directly to the studs, assuring a secure mounting. Hinge shall be concealed pivoting rod type. Latch shall be screwdriver operated. Finish shall be prime coat suitable for painting.

**STANDARD AVAILABLE SIZES**

Special sizes available upon request

	NOMINAL DOOR SIZE (WXH)	CEILING OPENING (minimum required)	LATCHES	WEIGHT
	4777 8" x 8"	8-1/4" x 8-1/4"	1	3.5 lbs.
	4777 10" x 10"	10-1/4" x 10-1/4"	1	4.5 lbs.
	4777 12" x 12"	12-1/4" x 12-1/4"	1	6 lbs.
	4777 14" x 14"	14-1/4" x 14-1/4"	1	7 lbs.
	4777 16" x 16"	16-1/4" x 16-1/4"	1	8 lbs.
	4777 18" x 18"	18-1/4" x 18-1/4"	3	11 lbs.
	4777 22" x 22"	22-1/4" x 22-1/4"	3	15 lbs.
	4777 24" x 24"	24-1/4" x 24-1/4"	3	16 lbs.
	4777 24" x 36"	24-1/4" x 36-1/4"	6	25 lbs.
	4777 30" x 30"	30-1/4" x 30-1/4"	7	24 lbs.
	4777 36" x 36"	36-1/4" x 36-1/4"	8	33 lbs.

**VARIATIONS:**

- Allen Key Latch -AKL
- Cylinder Lock (one per door) -CL
- Stainless Steel Construction -SS  
Type 304 No.4 Satin Finish

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
B A	5-21-19 6-18-15	Revised Table Revised Table	MW TBW	JM SJM			<b>4777</b>