



JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com

LOCATION

PISTON TYPE WATER HAMMER ARRESTERS

Maximum working pressure - Designed to keep residential, commercial and industrial water lines @ 350 p.s.i. maximum working pressure during pressure surges following quick valve closure. Working TEMPERATURE RANGE - From 33° to 250° F.

INSTALLATION

The piston unit can be installed in new construction or renovation/remodel. It can be installed at any angle to accommodate structural limitations, and should be placed as close to the shut-off valve as possible, one on each hot and cold line. The piston unit is seamless, factory charged and is maintenance free and does not require access panels. It cannot be charged in the field. For optimum performance, install the piston unit in a vertical position.

TYPICAL INSTALLATIONS

• Properly sized and placed the piston unit can be set in a multiple fixture branch for commercial/institutional/industrial/residential applications.

PISTON UNITS Comply with the following:
 ASSE/ANSI 1010 Water Hammer Arrester Standard
 PDI WH-201 Water Hammer Arrester Standard

NOTE: Systems exceeding 60 PSI (414 kPa) shall have a pressure reducing valve installed upstream of the WHA units per ASSE 1010 WHA Standard. PDI WH-201 states the pressure should not exceed 55 (379 kPa) psig.



FILE NO. 4785

LEAD FREE
 "CERTIFIED by IAPMO R & T"
 FILE NO. 8477
 (NSF/ANSI 372)


Smith Fig. No.	Sizing Symbol	Dimensions		Pipe Size CTS	Fixture Unit Capacity
		A	B (DIA)		
520SC-AA	AA	5 5/8"(143)	7/8"(22)	1/2"(13) (5/8" OD)	1 to 3
520SC-A	A	6 9/16"(167)	1 1/8"(29)	1/2"(13) (5/8" OD)	1 to 11
520SC-B	B	10 13/16"(275)	1 3/8"(35)	3/4"(19) (7/8" OD)	12 to 32
520SC-C	C	14"(356)	1 3/8"(35)	1"(25) (1 1/8" OD)	33 to 60
520SC-D	D	13 1/2"(343)	2 1/8"(54)	1 1/4"(32) (1 3/8" OD)	61 to 113
520SC-E	E	13 1/4"(337)	2 5/8"(67)	1 1/2"(38) (1 5/8" OD)	114 to 154
520SC-F	F	14 1/8"(359)	2 5/8"(67)	2"(50) (2 1/8" OD)	155 to 330

♦♦ AA Size for use in residential applications only

NOTE: Dimensional data is subject to manufacturing tolerances and change without notice.

WATER HAMMER ARRESTER SIZING
 REFER TO PDI WH-201 (2017) WATER HAMMER ARRESTER STANDARD, TABLES IV AND V FOR FIXTURE UNIT VALUES AND SIZING.
www.pdionline.org

NOTE: Dimensions shown in parentheses are in millimeters.

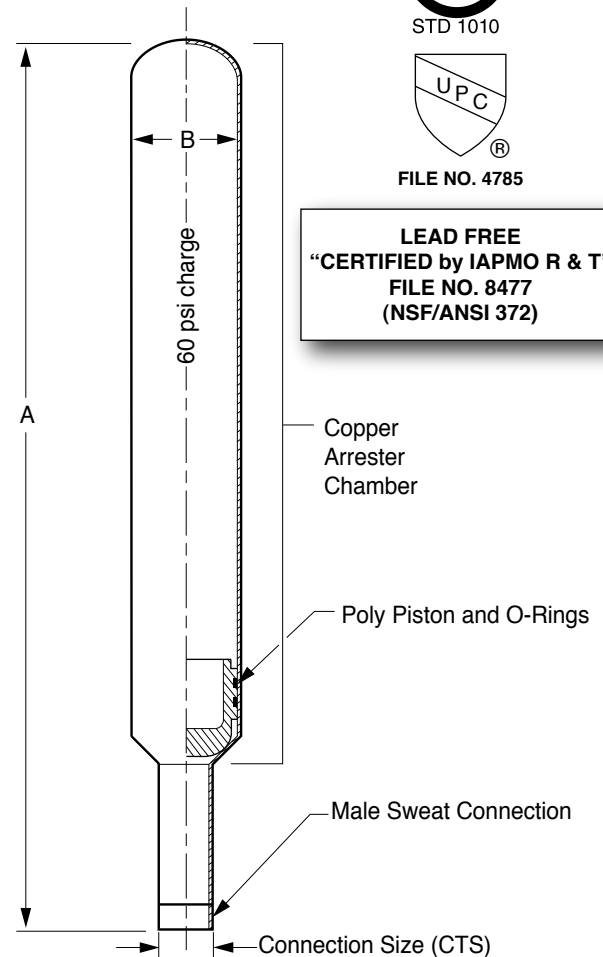

D

DRAWING NUMBER

S520-SC SERIES

SIZE

A

SCALE:

NONE

DATE:

7-30-19

APPROVED BY:

JM

CHECKED BY:

JM

DRAWN BY:

TBW

FIGURE NUMBER

520-SC SERIES

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.

DATE

DESCRIPTION

BY

CKD. BY

WEIGHT POUNDS

VOLUME CUBIC FEET

FIGURE NUMBER

520-SC SERIES