

FREEZELESS SILLCOCK

FUNCTION: For installation in interior or exterior building walls where an exposed hose connection is acceptable. Self-Draining feature provides positive non-freeze protection and integral vacuum breaker provides backflow protection.

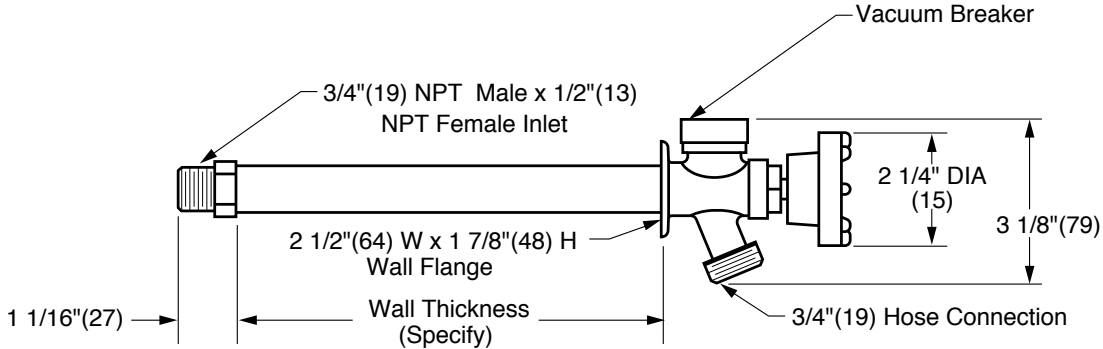


	Fig. 5630-04	4(100) Wall Thickness
	Fig. 5630-06	6(150) Wall Thickness
	Fig. 5630-08	8(205) Wall Thickness
	Fig. 5630-10	10(255) Wall Thickness
	Fig. 5630-12	12(305) Wall Thickness

NOTES:

1. Recommended wall opening 1 1/4"(32). Hydrant shall be installed in horizontal position only with hose connection pointing down.
2. When ordering, specify wall thickness in 02"(51) increments as follows: 04(100), 06(150), 08(205) 10(255) or 12 (305).
3. All Jay R. Smith hydrants are manufactured with "NO-LEAD" brazing rings and USDA approved lubricants.
4. The AB1953, California Lead Law and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
5. Dimensions shown in parentheses are in millimeters.
6. **FOR IRRIGATION PURPOSES ONLY.**

REGULARLY FURNISHED:
 Lead Free Rough Bronze Chrome Plated
 Non-Freeze Hydrant with Integral Wall Flange
 and Vacuum Breaker, Wheel Handle and 3/4"(19)
 Hose Connection.

Installer is responsible for providing a 100% watertight positive seal at the hydrant to wall interface. Seal all the flange with an appropriate sealant recommended by a sealant manufacturer. NOTE: Jay R. Smith does not warrant the performance or life expectancy of the sealant material.

DRAWING NUMBER **s5630**
 SIZE **A**
 SCALE: **NONE**
 DATE: **6-16-11**
 APPROVED BY: **CL**
 CHECKED BY: **CL**
 DRAWN BY: **TBW**
5630
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 5630