


# MILD CLIMATE ANTI-SIPHON SILLCOCK

## DUAL CHECK VALVE - BACKFLOW PROTECTED

**FUNCTION:** For installation in interior and exterior wall locations of buildings that are not subject to freezing. Dual Check valve prevents backflow due to low head pressure and conforms to the requirements of ASSE Standard 1052.

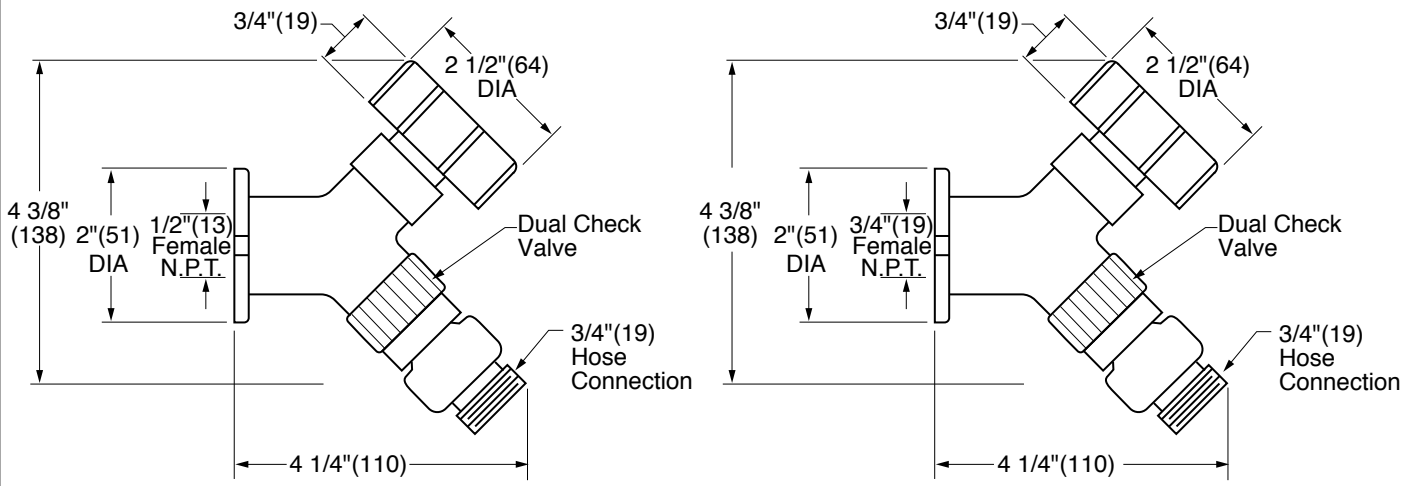

□ Fig. 5672 (-BFP) ..... 1/2"(13) Inlet

□ Fig. 5673 (-BFP) ..... 3/4"(19) Inlet

**NOTES:**

1. The AB1953, California Lead Law, and NSF/ANSI Standard 61-2008 - Drinking Water Components are not applicable to Jay R. Smith hydrants as they do not convey/dispense water for human consumption through drinking or cooking.
2. The Dual Check Valve may discharge water to prevent backflow. Do Not install where spillage may cause water damage.
3. Dimensions shown in parentheses are in millimeters.
4. **FOR IRRIGATION PURPOSES ONLY.**

**REGULARLY FURNISHED:**

Hose Valve has a Rough Finish Brass Body Removable Wheel Handle, "T" Handle Key, NPT Female Threaded Inlet Size Indicated by Figure Number Selected and ASSE 1052 Dual Check Valve with 3/4"(19) Hose Connection.

Installer is responsible for providing a 100% watertight positive seal at the hydrant to wall interface. Seal all the flange with an appropriate sealant recommended by a sealant manufacturer. **NOTE: Jay R. Smith does not warrant the performance or life expectancy of the sealant material.**

**NOTE:** Dimensions shown in Parentheses are in millimeters.

DRAWING NUMBER: 5672, 5673 (-BFP)  
 SIZE: A  
 SCALE: NONE  
 DATE: 7-11-11  
 APPROVED BY: CL  
 CHECKED BY: CL  
 DRAWN BY: TBW  
 FIGURE NUMBER: 5672 (-BFP) 5673 (-BFP)

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	<b>FIGURE NUMBER</b> <b>5672 (-BFP)</b> <b>5673 (-BFP)</b>