


SPECIAL PURPOSE DRAINS

LARGE CAPACITY - BOTTOM OUTLET

FUNCTION: When large grate free area is required for accelerated drainage. Shallow body with offset outlet and flange permits installation in unique construction situations.

Free Area
 296 SQ IN
 (1910) SQ CM

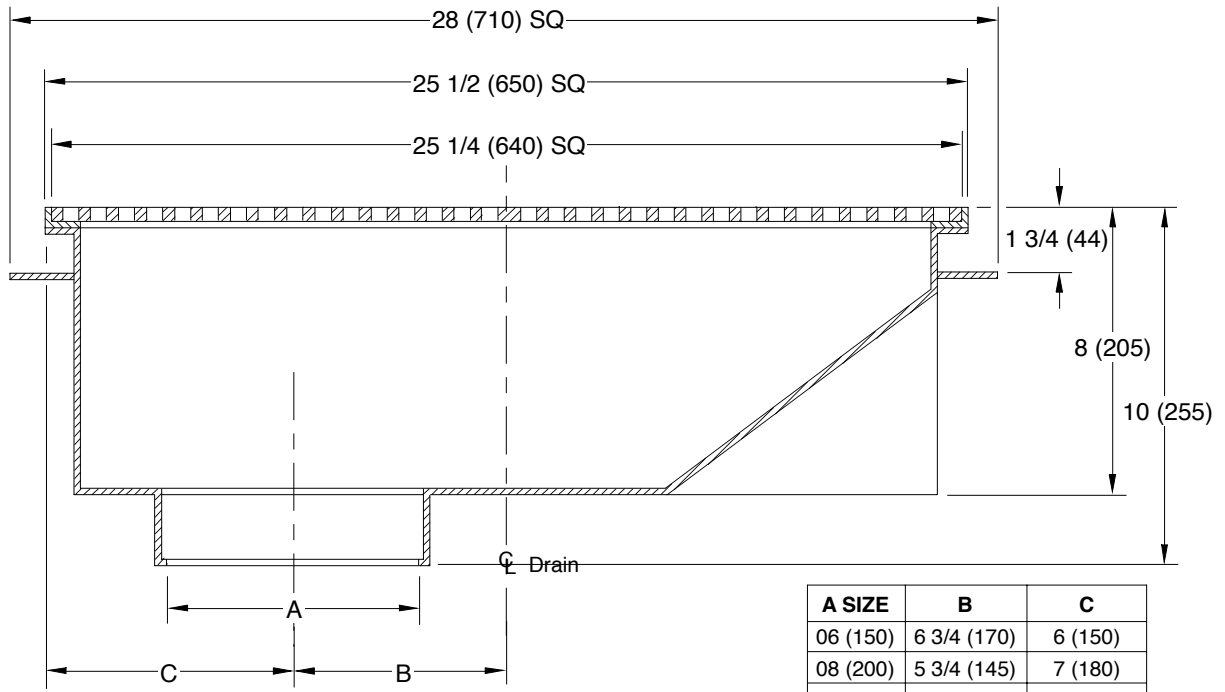

A SIZE	B	C
06 (150)	6 3/4 (170)	6 (150)
08 (200)	5 3/4 (145)	7 (180)
10 (255)	4 1/2 (115)	8 1/4 (210)
12 (305)	3 1/2 (89)	9 1/4 (235)

Fig. 6060C . . . CAULK OUTLET ONLY

REGULARLY FURNISHED:

Fabricated Stainless Steel Body and Frame with Fabricated Stainless Steel Loose Set Grates.

VARIATIONS:

- Flashing Clamp -C
- Secured Grates -SG
- Secured Grates with Vandal Proof Screws -U
- Y NO-HUB Outlet

NOTE: This product does not conform to or meet the requirements of ASME Standard No. A112.19.8-2007, titled "Suction Fittings for Use in Swimming Pools, Wading Pools, Spas, and Hot Tubs." This product shall not be used in any installation in swimming pools, wading pools, spas, hot tubs as well as other aquatic facilities. Due to the potential endangerment from arduous and forceful suction, entrapment or entanglement regardless of whether it is hair, head, limbs or other body parts, this product is prohibited from installation in these applications.

NOTE: Dimensions shown in parentheses are in millimeters.

FIGURE NUMBER **6060**
 DRAWN BY: BS
 CHECKED BY: DT
 APPROVED BY: SJM
 DATE: 3-24-83
 SCALE: NONE
 SIZE: A
 DRAWING NUMBER S6060

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 6060
		Revised Optional Materials Revised Reg. Furn. Revised Variations Added ASME Note	MW TBW RN JJ	CL CL CL CL			