


SS TRENCH DRAIN

LIGHT DUTY STAINLESS STEEL TRENCH DRAIN

FUNCTION: Used in kitchens and food processing areas as kettle drains, floor drains or trough drains.

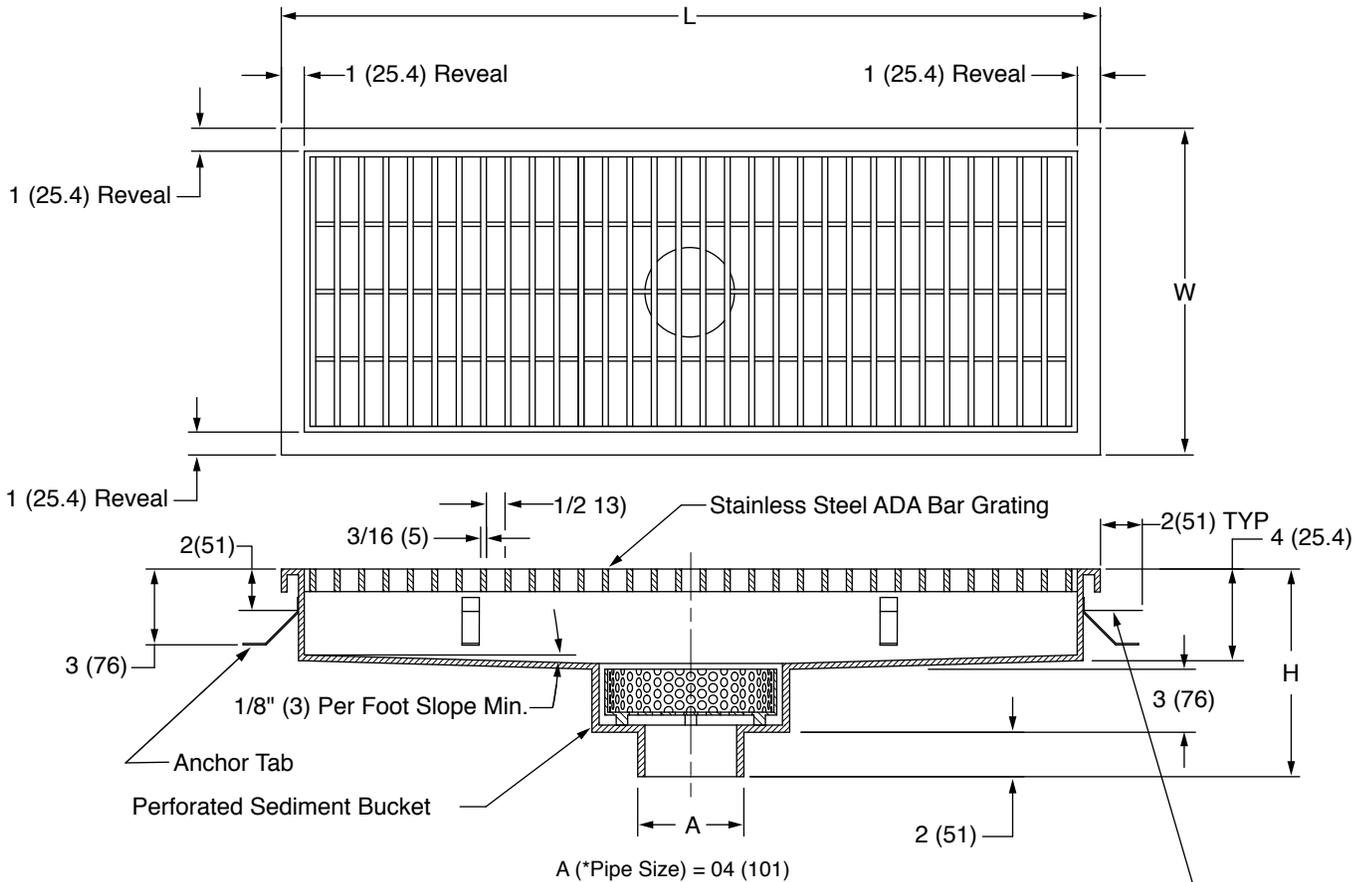

REGULARLY FURNISHED:
 All Fabricated 14 Gage Type 304 Stainless Steel Trench Drain Body with 4" (101) NO-HUB Outlet, Sediment Bucket, Anchor Tabs and Stainless Steel Light Duty Bar Grating with 3/16" (5) x 1" (25.4) Bars at 1/2" (13) Bar Spacing.

OPTIONAL MATERIAL:
 Type 316 Stainless Steel -316

VARIATIONS:
 1/4" (6) Bar Spacing -25
 Anti-Splash Guard -ASG
 Flashing Flange & Flashing Clamp -FC
 Anchor Flange -F

When Specified
 Flashing Clamp -FC

AVAILABLE SIZES	W	L	H
9675-1224	12" (305)	24" (610)	9 1/8" (232)
9675-1236	12" (305)	36" (914)	9 3/16" (233)
9675-1248	12" (305)	48" (1219)	9 1/4" (235)
9675-1260	12" (305)	60" (1524)	9 3/8" (238)
9675-1824	18" (305)	24" (1524)	9 1/8" (232)
9675-1836	18" (305)	36" (1524)	9 3/16" (233)
9675-1848	18" (305)	48" (1524)	9 1/4" (235)
9675-1860	18" (305)	60" (1524)	9 3/8" (238)



DRAWING NUMBER: 9675
 SIZE: A
 SCALE: NONE
 DATE: 4-1-15
 APPROVED BY: PJ
 CHECKED BY: PJ
 DRAWN BY: TBW
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY
B	3-31-17	Added Anchor Flange	TBW	PJ
A	3-22-17	Added -FC	TBW	PJ

WEIGHT POUNDS	VOLUME CUBIC FEET
---------------	-------------------

FIGURE NUMBER
9675