

DRAWING NUMBER **S9691**

SIZE **A**

SCALE: **NONE**

DATE: **5-4-82**

APPROVED BY: **J.M.**

CHECKED BY: **K.H.**

DRAWN BY: **C.R.**


FIGURE NUMBER **9691 SERIES**

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

14 GAGE STAINLESS STEEL FLOOR, AREA & INDIRECT WASTE DRAINS WITH 12" (304) SQUARE TOP

FUNCTION: Used in all locations where superior sanitation, corrosion resistance, durability and longevity are required. Essential in restaurants, kitchens and all types of food handling areas for ultimate sanitation. Ideal for breweries, dairies, creameries and similar processing plants where sanitation is paramount. Also suitable for use in chemical plants, laboratories and other areas where the corrosion-resistance of type 304 stainless steel is satisfactory for the intended service.

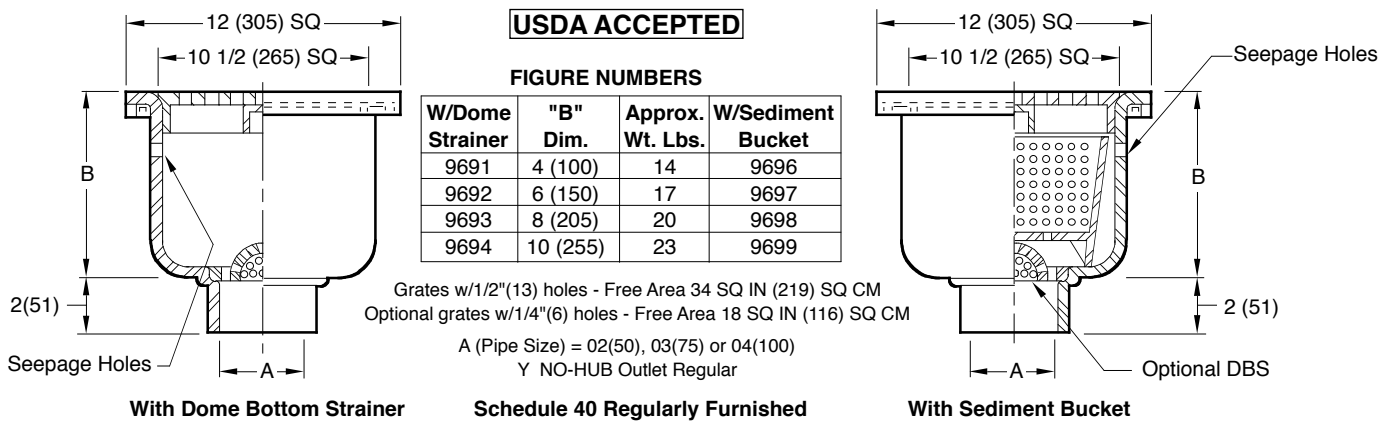

FEATURES, OPTIONS AND ORDERING INFORMATION

REGULARLY FURNISHED: 14 Gage Type 304 SS Receptor Body with "Seepage Control Holes", Cast Type 316 SS Ribbed Non-Tilt Loose Set Gate with 1/2"(13) Square Holes. Perforated SS Dome Bottom Strainer or Sediment Bucket as Indicated by Figure Number.

- VARIATIONS:**
- Dome Bottom Strainer -DBS (Bucket Models only)
 - Less Seepage Control Holes -LSH
 - Solid Ported Bucket -SBP
 - With Anchor Flange -F
 - With Flange and Flashing Clamp -F-C
 - Trap Primer Connection -P050 1/2"(13) & -P075 3/4"(19)
 - BW Butt Weld Outlet (Specify Schedule -S05, -S10 or -S40)
 - T Male Threaded Connection
 - USDA Compliant

- BUCKET MODELS ONLY:**
- With SS Solid Bottom Ported Bucket -SBP
 - With SS Dome Bottom Strainer -DBS
- OPTIONAL MATERIALS:**
- Fabricated from Type 316 Stainless Steel -316 ASME A112.6.3 & CSA B79



NOTE: When determining location of this drain, consideration must be given to traffic loading factors. When used in areas where the drain is subjected to any traffic loading heavier than pedestrian foot traffic, the location, load and description of load shall be submitted to Jay R. Smith's Sales Engineering Department for evaluation and selection of proper grate.

OPTIONAL TOP GRATES AND COVERS

- | | |
|---|--|
| <p>Suffix Description</p> <ul style="list-style-type: none"> <input type="checkbox"/> -10Less SS Grate <input type="checkbox"/> -12With SS 1/2 Grate <input type="checkbox"/> -13With SS 3/4 Grate <input type="checkbox"/> -14With SS 2 1/2(64) Sq. Center Hole Grate <input type="checkbox"/> -15With SS Recessed Grate with Handle <input type="checkbox"/> -21With SS Grate with 4"(100) Dia. SS Funnel <input type="checkbox"/> -22With SS Grate with 6"(150) Dia. SS Funnel <input type="checkbox"/> -25With SS Grate with 8 1/4(210) x 3 1/4(53) x 4 1/2"(115) High Oval SS Funnel <input type="checkbox"/> -26With SS Grate with 6(150) x 2 1/2(64) x 1"(25) High Oval SS Funnel <input type="checkbox"/> -41With SS Solid Cover <input type="checkbox"/> -42With SS 1/2 Solid Cover <input type="checkbox"/> -43With SS 3/4 Solid Cover <input type="checkbox"/> -44With SS 2 1/2"(64) Sq. Center Hole Solid Cover | <p>Suffix Description</p> <ul style="list-style-type: none"> <input type="checkbox"/> -61With SS Heel-Proof Ribbed Non-Tilt Loose Set Grate with 1/4"(6) Sq. Holes - Certified Light Duty <input type="checkbox"/> -63With SS Medium Duty Heel-Proof Ribbed Non-Tilt Loose Set Grate with 1/4"(6) Sq. Holes - Certified Medium Duty <input type="checkbox"/> -64With SS Heavy Duty Ribbed Non-Tilt Loose Set Grate with 1/2"(13) Sq. Holes <input type="checkbox"/> -66With SS Extra Heavy Duty Ribbed Non-Tilt Loose Set Grate with 1/2"(13) Sq. Holes - Certified Extra Heavy Duty <input type="checkbox"/> -69With 1"(25) Thick Under bolted NB Rim and Extra Heavy Duty Cast Stainless Steel Secured Grate (Flange Regularly Furnished 2"(51) from top will become 3"(76) from top) Certified Extra Heavy Duty |
|---|--|
- Flange is located 2" (51) from top of drain. 3"(76) when specified.
- NOTE:** Dimensions shown in parentheses are in millimeters.

V	12-13-21	Added ASME and CSA numbers Revised Variations, Added Note Added cUPC Revised Function	KK	CL	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER 9691 SERIES
U	5-17-18		TBW	CL			
T	4-24-17		TBW	CL			
S	1-18-17		TBW	CL			
REV.	DATE	DESCRIPTION	BY	CKD. BY			