


FLOOR DRAINS STAINLESS STEEL - CARBON STEEL

8 1/2" (215) ROUND MEDIUM DUTY TOP

Free Area
 20.50 SQ IN
 (132) SQ CM

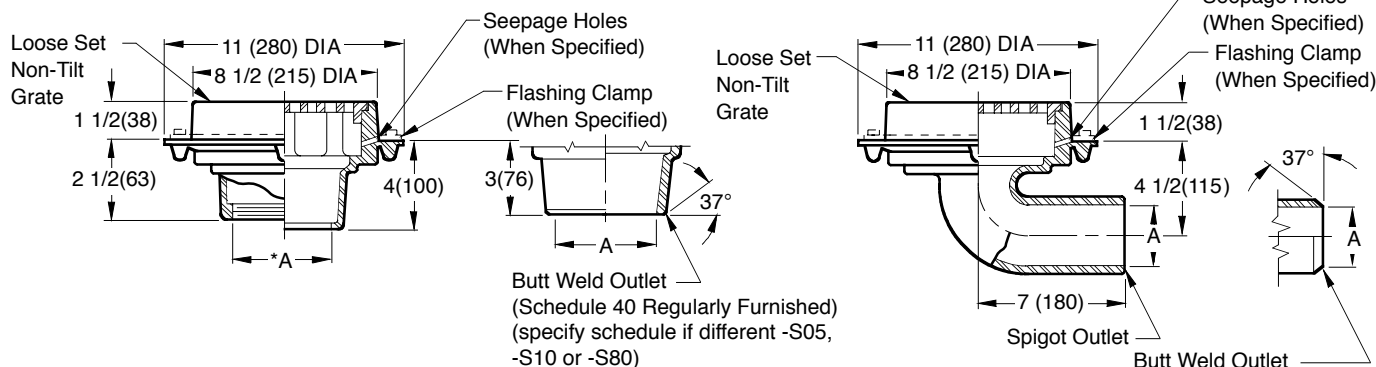

A (Pipe Size) = 02(50), 03(75), or 04(100)

- Fig. 9710BW . . . BUTT WELD OUTLET
- Fig. 9710C CAULK OUTLET
- Fig. 9710T THREADED OUTLET
- Fig. 9710Y . . . NO-HUB OUTLET

- Fig. 9715BW . . . BUTT WELD OUTLET
- Fig. 9715S SPIGOT OUTLET

REGULARLY FURNISHED:

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body, and Loose Set Non-Tilt Grate.

VARIATIONS:

- 4"(100) Extension -E04
- 4(100) or 6"(150) Dia. Funnel (Specify Fig. 9703)
- 8 3/4(220) x 3 3/4"(95) Funnel (Specify Fig. 9704)
- Closure Plug and Gasket Available in Stainless Steel -XPSS or Plastic -XPP
- Closure Plug with 3/4"(19) Test Plug -TP (Specify Material)
- Flashing Clamp with Seepage Holes -C
- Flat Bottom Strainer -FBS
- Satin Finish Top -SF
- Sediment Bucket -B
- Seepage Holes -WSH
- Solid Scoriated Cover -SC
- Vandal Proof Grate -U

OPTIONAL MATERIALS:

- A-27 Carbon Steel -A27
- Cast Iron Grate -CIG
- CF8M (Equivalent to Type 316) Stainless Steel -316
- Nickel Bronze Grate -NB
- Polished Bronze Grate -PB

Design Pressures and Temperatures

1. With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
2. When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

NOTE: Dimensions shown in parentheses are in millimeters.

DRAWING NUMBER: S9710
 SIZE: A
 SCALE: NONE
 DATE: 11-12-84
 APPROVED BY: T.D.
 CHECKED BY: VGD
 DRAWN BY: PJ
 FIGURE NUMBER: 9710, 9715
 DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE
 WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

REV.	DATE	DESCRIPTION	BY	CKD. BY	WEIGHT POUNDS	VOLUME CUBIC FEET	FIGURE NUMBER
							9710, 9715