O<sub>R</sub>

OF SUPERSEDED

CAN ASSUME NO


ME

TOLERANCE AND CHANGE WITHOUT NOTICE

# CLEANOUT STAINLESS STEEL - CARBON STEEL

## 8 1/2" (215) ROUND ADJUSTABLE TOP SOLID SCORIATED COVER AND CLOSURE PLUG

**FUNCTION:** Used in floors where a solid cover and internal gasketed closure plug are required. Internal plug prevents sewer gas from escaping into building. Adjustable top collar permits accurate position of top cover to meet finished floor.

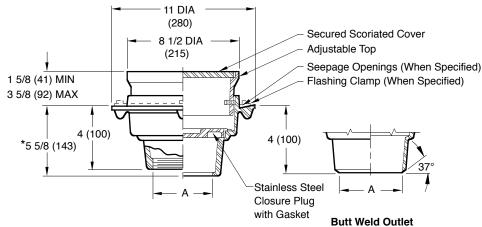

\*5 1/8"(130) for NO-HUB Outlet. A (Pipe Size) = 02(50), 03(75) or 04(100)

Schedule 40 Regularly Furnished (Specify Schedule if Different -S05, -S10)

Fig. 9735BW	BUTT WELD OUTLET
Fig. 9735C	CAULK OUTLET
Fig. 9735T	THREADED OUTLET
Fig. 9735Y	NO-HUB OUTLET

#### **REGULARLY FURNISHED:**

CF8 (Equivalent to Type 304) Rough Finish Stainless Steel Body, Adjustable Top, Secured Scoriated Cover and Gasketed Stainless Steel Closure Plug.

#### **Design Pressures and Temperatures**

- With proper outlet connection, shall be watertight up to 10 ft. of water column (4.34 psig).
- When exposed to effluent appropriate for drain material, the drain shall withstand effluent temperatures of 180 degrees F at ambient pressure.

### **VARIATIONS:**

4" (100) Extension -E04
Plastic Closure Plug and Gasket -XPP
Closure Plug with 3/4" (19) Test Plug -TP
(Specify Material)
Flashing Clamp with Seepage Holes -C

Flashing Clamp with Seepage Holes -C
Satin Finish Top -SF
Seepage Holes -WSH

Vandal Proof Cover -U 90° Side Outlet (Specify Fig 9759)

#### OPTIONAL MATERIALS:

A-27 Carbon Steel -A27
CF8M (Equivalent to Type 316)
Stainless Steel -316

**NOTE:** Dimensions shown in parentheses are in millimeters.

K J H G	12-1-14 6-19-13 10-17-11 9-30-09	Add BW & NO-HUB, Rev. Var, Add Note Revised Dimension Added Note Revised Drawing	TBW TBW TBW RN	CLCL	VOLUME CUBIC FEET	FIGURE NUMBER  9735
REV.	DATE	DESCRIPTION	BY	CKD. BY		