



JAY R. SMITH MFG. CO.®
 MEMBER OF MORRIS GROUP INTERNATIONAL
 POST OFFICE BOX 3237
 MONTGOMERY, ALABAMA 36109-0237 (USA)
 TEL: 334-277-8520 FAX: 888-377-7818 www.jrsmith.com



MEMBER OF:

LOCATION

DRAWING NUMBER
9890-865-SSP

SIZE
A

SCALE:
NONE

DATE:
11-21-14

APPROVED BY:
MD

CHECKED BY:
MD

DRAWN BY:
MD

FIGURE NUMBER
9890-865-SSP


WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE




9890-865-SSP STAINLESS STEEL PERFORATED GRATE SPECIFICATION SHEET



FUNCTION: This grate has 1/4" (6) holes for effective surface drainage. Minimizes high heel hazard and large debris collection. Heavy loads and frequent traffic. ADA compliant. For use in 14" wide non-Powerlok trench drains. Secured with Quicklok locking devices.

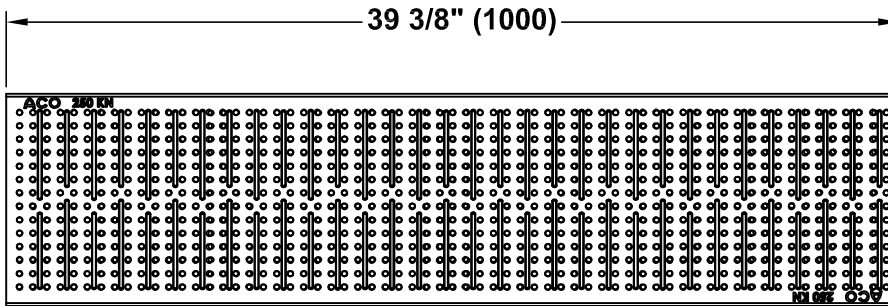

1 METER

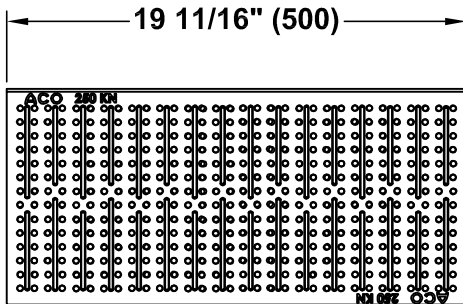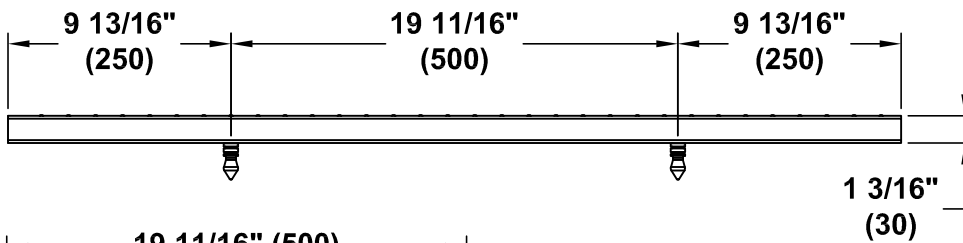

1/2 METER

TECHNICAL CHARACTERISTICS

	1 meter	1/2 meter
Weight	30.9 lbs	15.0 lbs
Intake Area	64.8 Sq In	31.9 Sq In
Percent Opening	12%	12%
Material	Type 304 Stainless Steel	

Heavy Duty, DIN 19580/EN 1433 Class E
 56,000 lbs - 1.162 psi, for commercial pneumatic tire traffic patterns, forklifts and tractor trailers.

REV.	DATE	DESCRIPTION	BY	CKD. BY

WEIGHT POUNDS	VOLUME CUBIC FEET

FIGURE NUMBER
9890-865-SSP



WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov