DRAWN BY:

CHECKED BY: **TK**

APPROVED BY: **TK** DATE: **04/06/10**


SCALE: NONE SIZE

DRAWING NUMBER **sRH9530LI**

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA

TANK LEVEL INDICATOR

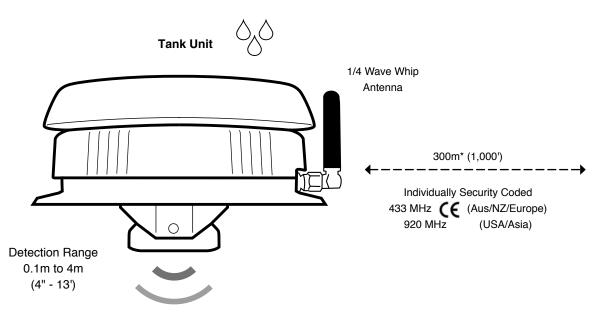

- **Display Unit**
 - External Power Jack
 - 6V DC **⊙ ⊕ ⊕**

- Use on any non-flammable fluid (water, diesel, septic)
- 4 x AA Alkaline batteries (supplied)
- 1/4 Wave Whip Antenna
- 135mm diameter x 80mm H (5 3/8"D x 3 1/8"H)

· Antenna: PCB Loop Antenna

100% — Re-calibrating

__ Tank battery low

- Bench battery low

Transponder cannot range

— Internal failure

Rapid water loss

0%O-Low fluid level

- 4 x AA Alkaline batteries (supplied)
- 92mm W x 73mm D x 50mm H (3 5/8"W x 2 7/8"D x 2"H)
- * Range shown is line of sight. Objects between units will reduce range.

Level Indicator

CURRENT

- Temperature Range: -10 to +60°C (14 140°F)
- Approval: AS/NZS 4268:2003
- 1:2005 CE
- Housing: ABS Plastic
- · Circuit Boards: ROHS compliant



I	REV.	DATE	DESCRIPTION	BY	CKD. BY

DATE: DRAWN BY: APPROVED BY: SCALE: DRAWING NUMBER CHECKED BY: **RH9530LIBS** NUMBER ΤK ΤK 04/06/10 NONE sRH9530LIBS DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE AND CHANGE WITHOUT NOTICE WE CAN ASSUME NO RESPONSIBILITY FOR USE OF SUPERSEDED OR VOID DATA **TANK LEVEL INDICATOR Display Unit** 300m (1000') MAX **Tank Unit** Sample Installation Ultrasonic sound waves JAY R. SMITH MFG. CO. ® SMITH® POST OFFICE BOX 3237 MONTGOMERY, ALABAMA 36109-0237 (USA) TEL: 334-277-8520 FAX: 334-272-7396 www.jrsmith.com REV. DATE DESCRIPTION CKD. BY