NOMINAL SIZE + 2.5"-

DRAWING NUMBER S4789

SIZE

FOR USE OF SUPERSEDED OR VOID DATA

NONE

DATE:

APPROVED

CHECKED BY

TOLERANCE AND CHANGE WITHOUT NOTICE

SUBJECT TO MANUFACTURERS

TBW **DRAWN BY:**


- (1) Concealed pivoting rod hinge
- 2 Door
- ③ Frame
- (4) Allen head with security pin
- (5) Mounting holes

REGULARLY FURNISHED:

Security Doors are ideally suited for new installations or for remodeling, iails, prisons, psychiatric institutions. and schools. Door and frame are fabricated from 12 gage, galvannealed steel with a prime coat white finish. Frame is fabricated from 12 gage, galvannealed steel with a prime coat finish and provided with bolt holes. Pivoting rod hinge is continuous and concealed. Latch is allen head with security pin. Finish is a prime coat white.

GUIDE SPECIFICATION:

Provide 4789 Series, Medium Security Access Doors (Specify options). Access door and frame shall be fabricated from 12 gage, galvannealed steel with a prime coat white finish. The door shall have rounded safety corners and a concealed pivoting rod hinge. Frame shall be one piece construction with no miters or welds on the face. Latch shall be allen head with security pin operated. Finish shall be a prime coat white.

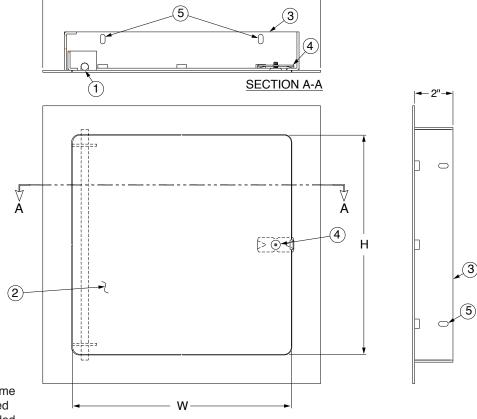

| | VAVII VBI E GIZEG |
|------------------|------------------------|
| JIANDAND | AVAILABLE SIZES |
| 10 | !! . ! . ! |
| ISDECIAL SIZES 2 | available upon request |

| opedial dized available apoli request | | | | | | | | |
|---------------------------------------|-------------------|-------------------|---------|---------|--|--|--|--|
| NOMINAL DOOR SIZE | (W X H) | WALL OPENING | LATCHES | WEIGHT | | | | |
| 4789 12" x 12" | 11-1/2" x 11-1/2" | 12-3/4" x 12-3/4" | 1 | 12 lbs. | | | | |
| 4789 16" x 16" | 15-1/2" x 15-1/2" | 16-3/4" x 16-3/4" | 2 | 18 lbs. | | | | |
| 4789 18" x 18" | 17-1/2" x 17-1/2" | 18-3/4" x 18-3/4" | 2 | 22 lbs. | | | | |
| 4789 24" x 24" | 23-1/2" x 23-1/2" | 24-3/4" x 24-3/4" | 4 | 34 lbs. | | | | |
| 4789 24" x 36" | 23-1/2" x 35-1/2" | 24-3/4" x 36-3/4" | 5 | 47 lbs. | | | | |
| 4789 36" x 36" | 33-1/2" x 35-1/2" | 36-3/4" x 36-3/4" | 5 | 65 lbs. | | | | |

VARIATIONS:

Cylinder Lock (one per door) -CL Stainless Steel Construction -SS Type 304 No. 4 Satin Finish

| C B A | 5-21-19 9-16-15 6-18-15 | Revised Table, Dimension Revised Table, Dimension Revised Table | MW TBW TBW | JM SJM SJM | VOLUME CUBIC FEET | FIGURE NUMBER |
|-------------|-------------------------------|---|------------------|------------------|--------------------------|---------------|
| REV. | DATE | DESCRIPTION | BY | CKD. BY | | 4/09 |